



USER MANUAL

ROCK CRAWLER

NO.EX86180PRO



ROCK CRAWLER



WARNING:
This product is only for 14 years old or above

Notes:

- ⇒ Read and understand the instructions carefully before operating or assembling your racing model.
- ⇒ Specifications are subject to change without prior notice, and actual received model may vary from the images and/or descriptions in this manual.

The product has conducted IQC (Input Quality Control) and full inspection before delivery. The manufacturer is responsible for quality assurance. Remote Control model is assembled manually, and then there may have some defects in the production process. Once the product is modified or incorrect operation, it cannot apply for replacement and return services, for the parts and accessories may be damaged. Please contact the retail seller for after-sales service when needed.

The product conforms to technical requirements of export safety regulations.



Please read and follow all the instructions in the manual before use.

MADE IN CHINA

Factory Address: Huang Jiang Town, Dong Guan City, Guang Dong Province, China

Production Date: refer to packing instruction



Introduction

We would like to welcome you to the world of remote control cars. What are RC cars? The simple answer is that they are radio controlled cars that respond precisely to your command. The more complete answer is that they can be a great addition to your lifestyle. RC car building and racing teach valuable mechanical and electrical skills, promote teamwork and encourage racers to test their skills with other racers from around the world. Whether you are just having fun racing your car in your backyard or racing at the world competition contest, radio controlled car racing is a great hobby.

We have been making RC products aimed at making our hobby fun and exciting with an affordable price. We are confident that your experience with our products will be positive. Of all the radio controlled models out there, no question about it, RC cars are the hardest to operate. This user manual covers a wide range of topics from nitro powered remote control cars to electrical powered remote control cars. We highly recommend that you read this user manual thoroughly and carefully before assembling and operating. Please follow all precautions and recommendations located within the manual. Be sure to retain the manual for future reference, routine maintenance, and tuning.




This product is not a toy. It is not recommended for children under 14 years old and any minor should be accompanied by an adult when operating. This product is a precision machine that requires proper assembly and setup to avoid accidents. Failure to take caution when operating this product may result in serious injury or property damage. It is the owner's responsibility to operate this product in a safe manner. Manufacturer and its distributors are not responsible in any way for any and all bodily injury(s) and/or property damage that may occur from the use of or caused by in any way or this product.



Warnings

- The product is not intended for those under 14 years of age without proper adult supervision. The product is not a toy. It is a precision machine requiring proper assembly and setup to avoid accidents and it is the responsibility of the owner to operate this product in a safe manner as it can cause serious personal injury and damage to property due to carelessness or misuse.
- Do not attempt to disassemble or modify any of the product components without the assistance of an experienced RC user.
- Only use the correct type of battery to operate. Using any wrong type of battery will damage the product and possibly make it dangerous to operate.
- The motor(s) may get hot during use. Always allow 10-15 minutes between each operation for the motor to cool down. This will prolong the life of your product.
- Choose an appropriate operating site consisting of flat, smooth ground, and clear open field. Do not operate near buildings, high voltage cable lines, or trees to ensure safety operation. Operate in safe area only, away from other people. RC models are prone to accidents, failures, and crashes due to a variety of reasons including, lack of maintenance, user error, and radio interference. Users are responsible for their actions and damage or injury occurring during the operation.
- Do not operate in inclement weather, such as rain, wind, snow or darkness.
- The product is composed of precision electrical components. It is critical to keep the product away from moisture and other contaminants. Do not allow them to get wet. Electrical damage may occur that could affect safe operation.
- You should complete a successful pre-run check of your radio equipment and model prior to each run.
- Use replacement parts from the original manufacturer to ensure safe operation.
- Operate this product within your ability. Do not operate under tired condition
- After each use, always allow the battery to cool down before recharging. When charging the battery pack, do not overcharge! If batteries get hot during charging, discontinue charging immediately and disconnect the battery from the charger. Never leave battery unattended while charging. If you are unsure of how to charge this battery, please seek the advice of experienced RC users. Never let children charge the battery without adult supervision.
- Always turn on the transmitter before connecting the battery on the model. When turning off the model, always disconnect the battery first, and then turn off the transmitter. If the order is reversed, the model may become uncontrollable and cause serious damage.
- If you are in doubt of your ability to operate the model, we strongly recommend that you seek assistance from experienced RC users or join your local modeling club to gain the required knowledge and skill. As the manufacturer and distributor, we assume no liability for the use of this product.
- Before turning on your model and transmitter, please check to make sure no one else is operating under the same frequency. Frequency interference can cause your model, or other's models to crash. The guidance provided by experienced RC users will be valuable for the assembly, tuning, trimming, and actual first flight.
- Never allow batteries to run low or you might lose control of the model.
- Plastic is very susceptible to damage or deformation due to extreme heat and cold climate. Do not store the model near any source of heat such as oven or heater. Store the model indoors, in a climate-controlled, room temperature environment.
- Never shorten the receiver antenna; or this might affect the transmitting range of the radio system.
- This product is a RC hobby model, do not use for other purpose.

Safety

Pay close attention to the following symbols and their meanings. Failure to follow these warnings could cause damage, injury or death.

 Danger	Not following these instructions may lead to serious injuries or death.
 Warning	Not following these instructions may lead to major injuries.
 Attention	Not following these instructions may lead to minor injuries.


 Prohibited	<ul style="list-style-type: none"> ■ Do not use the product at night or in bad weather like rain or thunderstorm. It can cause erratic operation or loss of control. ■ Do not use the product when visibility is limited. ■ Do not use the product on rain or snow days. Any exposure to moisture (water or snow) may cause erratic operation or loss of control. ■ Interference may cause loss of control. To ensure the safety of you and others, do not operate in the following places: <ul style="list-style-type: none"> ● Near any site where other radio control activity may occur ● Near power lines or communication broadcasting antennas ● Near people or roads ● On any body of water when passenger boats are present ■ Do not use this product when you are tired, uncomfortable, or under the influence of alcohol or drugs. Doing so may cause serious injury to yourself or others. ■ The 2.4GHz radio band is limited to line of sight. Always keep your model in sight as a large object can block the RF signal and lead to loss of control. ■ Do not touch any part of the model that may generate heat during operation, or immediately after use. The engine, motor or speed control, may be very hot and can cause serious burns.
 Mandatory	<ul style="list-style-type: none"> ■ Misuse of this product may lead to serious injury or death. To ensure the safety of you and your equipment, read this manual and follow the instructions. ■ Make sure the product is properly installed in your model. Failure to do so may result in serious injury. ■ Make sure to disconnect the receiver battery before turning of the transmitter. Failure to do so may lead to unintended operation and cause an accident. ■ Ensure that all motors operate in the correct direction. If not, adjust the direction first. ■ Make sure the model stays within the systems maximum range to prevent loss of control.

Thanks for purchasing our RC car. The power system for RC model can be very dangerous, so please read this manual carefully. In that we have no control over the correct use, installation, application, or maintenance of our products, no liability shall be assumed nor accepted for any damages, losses or costs resulting from the use of the product. Any claims arising from the operating, failure of malfunctioning etc. will be denied. We assume no liability for personal injury, consequential damages resulting from our product or our workmanship.



START GUIDE

1. Please read the manual carefully and prepare the following things before use.

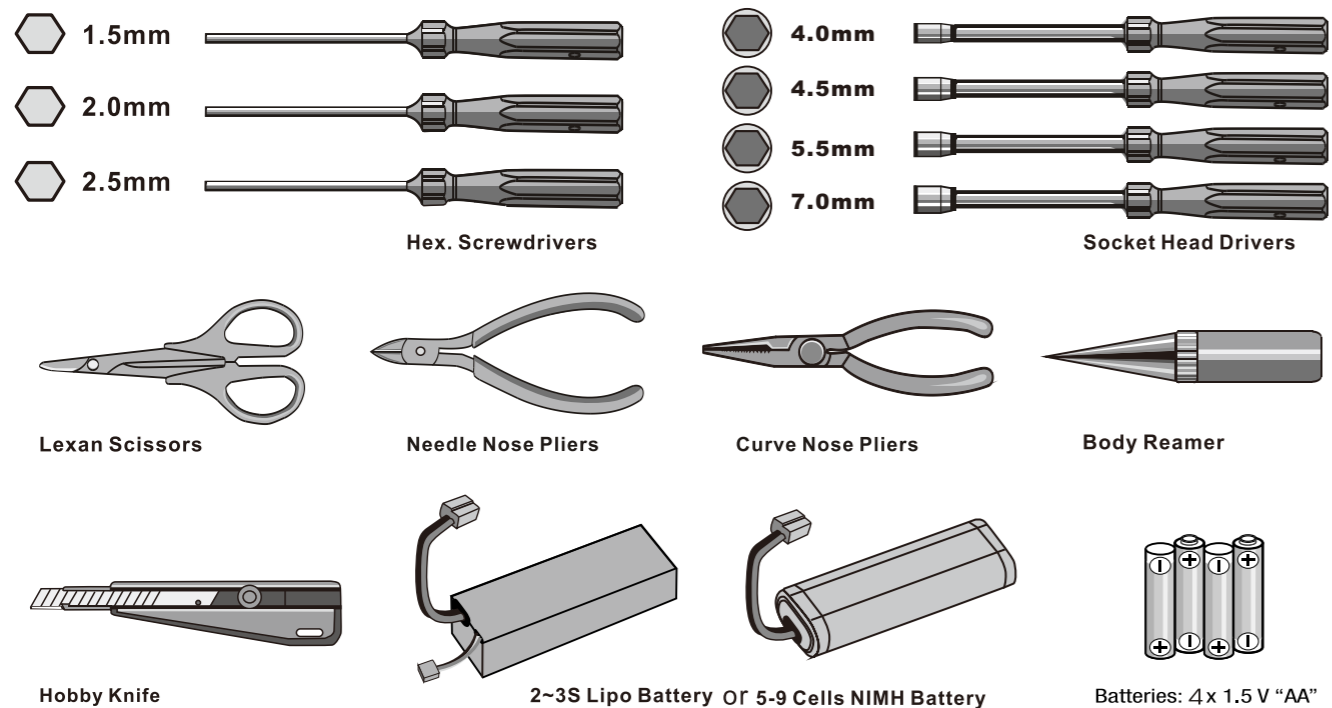

2. The items inside the box.




3. EX86180PRO TRACER Specifications.

Item No	Ex86180PRO	Wheel Base	313mm	Motor	550/8020
Item Name	TRACER	Wheel	120*45mm	Servo	15kg*2p
Scale	1/10	Clearance	65mm classis 48mm (steel)	Gead Ratio	52:1(F)/57:1(R)
Desciption	RTR-Crawler	Weight	2.76kg(No battery)	Breakover	28.3°
Drive Type	4WD	Radio/Rx	2.4G/4CH(FS-G4P4WS)	Approach	79.5°
String Type	4WS	R/C Distance	<120m>100m	Departue	90°
Length	450mm	Battery Recommendations	2S or 3S Lipo, 5-9 Cells NIMH Battery	Body Color	PC
Width	252mm	Battery Size	<142*50*55mm(L*W*H)	Gift Box Size	55*29.5*26.5CM
Height	220mm	ESC	WP-1060 / 60A	Piece per Carton	1P

4. Please check the whole product condition when open the package.

- 3-1. After each day of running, you should check your shocks for adequate fluid. If the fluid is low, or it is getting dirty, you should change the fluid in the shocks. To achieve better performance, you may also want to change the shock fluid and or the pistons.
- 3-2. Gear mesh is the clearance between the pinion and spur in an electric car or clutch bell and spur in a nitro car. It has impact on the vehicles performance. If the gear mesh is not set properly you may also damage the clutch bell and spur or the pinion gear and spur gear as soon as the vehicle starts running.
- 3-3. Please check if the screw is tight enough before use. Screw it tight (or apply the screw glue if necessary)
- 3-4. Reguarly check and verify he tires are intact . No breach should be observed.
Please apply the CA glue if needed.


5-1. Install Charged Batteries In Car.

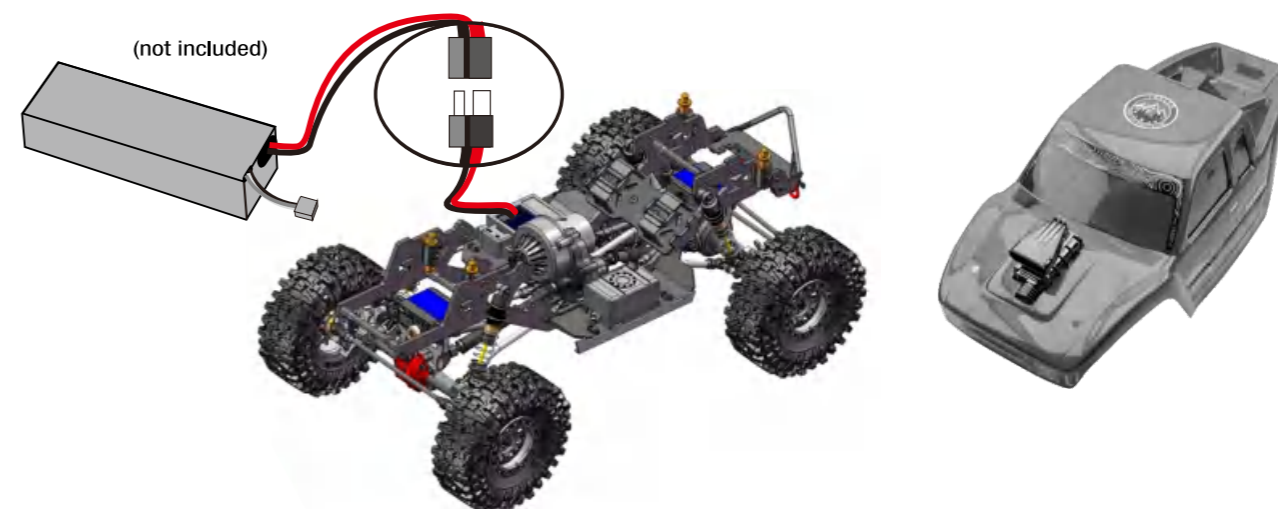

5-2. Battery Specifications for Product

WARNING:
NO battery includes in factory. Recommend?battery: 2S~3S LIPO battery or 5-9 cells NIMH battery (please match the ESC mode with the corresponding battery type)Pay attention to the battery size and plug specification when purchasing. The maximum battery measurement is 142*50*55mm LxWxH).

This product can use the 2S or 3S Li-Po battery

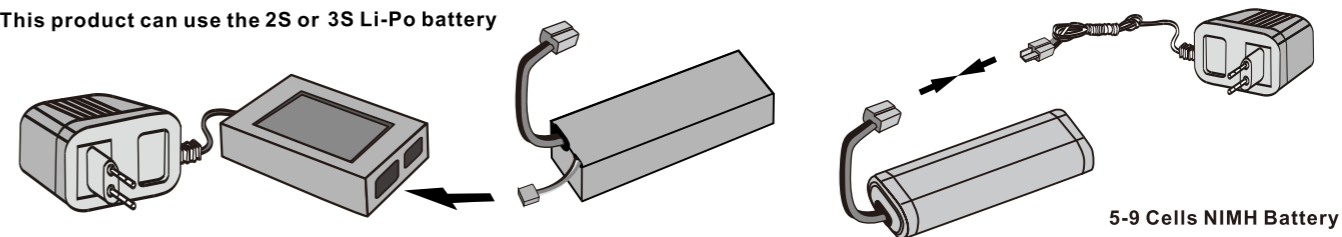

NOTICE
Please check the battery voltage before use. Please use a qualified charger to charge the newly purchased battery. (please read the charging steps in manual when necessary)

Charge the vehicle battery

- Connect charger plug with mains jack and then connect with connector of battery.
- Please be care of safety while charging, please remove charger plug from the mains jack once finish charging. Will be over heat if it is too long to be charging or incorrect charging way. must stop charging if over 45 degree for the battery temperature.
- Do not charge for battery at once when you take it away from your car. Please make sure battery in cool condition before recharge battery to keep battery performance running well and get a longer use life.


NiMH Battery Instructions

- Never dispose of NiMH batteries in a fire or store near sources of heat.
- Only use the supplied NiMH charger to charge the NiMH battery. Using another charger may permanently damage the battery and surrounding components and may also lead to injury.
- Batteries should only be charged on a fireproof surface, away from any flammable materials.
- Never leave the battery unattended when charging or discharging.
- Batteries must be discharged or fully exhausted before being disposed of. Cover exposed poles with adhesive tape to prevent short-circuiting!
- Never disassemble or alter the battery contacts. Do not damage or puncture battery cells. Doing so would result in an explosion hazard!
- Keep the NiMH battery away from children.

Lithium Polymer (LiPo) Battery Warnings

- Never charge a lithium polymer battery with a charger designed for NiCd, NiMH, or any other type of battery chemistry. Use ONLY charger designed for LiPo battery.
- Do not leave LiPo battery unattended during charging.
- Do not overcharge the battery.
- Always place the battery on a heat resistant surface alone when charging.
- Always put the LiPo battery inside a charging protection container while charging.
- Do not allow LiPo cells to overheat at any time. Cells which reach greater than 140 Fahrenheit (60C) will usually become damaged and will catch fire.
- Do not charge LiPo cells on or near combustible materials including paper, plastic, carpets, vinyl, leather, and wood inside an R/C model or full size automobile.
- Do not discharge LiPo; doing so will damage the battery.
- Do not expose LiPo cell to water or moisture at any time.
- Do not store battery near open flame or heater.
- Do not assemble LiPo cells or pre-assembled packs together with other LiPo cells or packs.
- Always store LiPo battery in a secure location away from children.
- Always remove the LiPo battery if model is involved in any kind of crash. Carefully inspect the battery and connectors for even the smallest damage. CAUTION: cells may be hot!
- Do not allow the electrolyte to get into eyes or on skin. Wash affected areas immediately if they come into contact with electrolyte. Do not alter or modify connectors or wires of a LiPo battery pack.
- Always inspect the condition of the battery before charging and operating.
- Do not short circuit the LiPo battery.
- Do not have contact with a leaky/damaged battery directly.
- Do not charge battery out of recommended temperature range (0C - 45C).


5-3. Scheme of installation

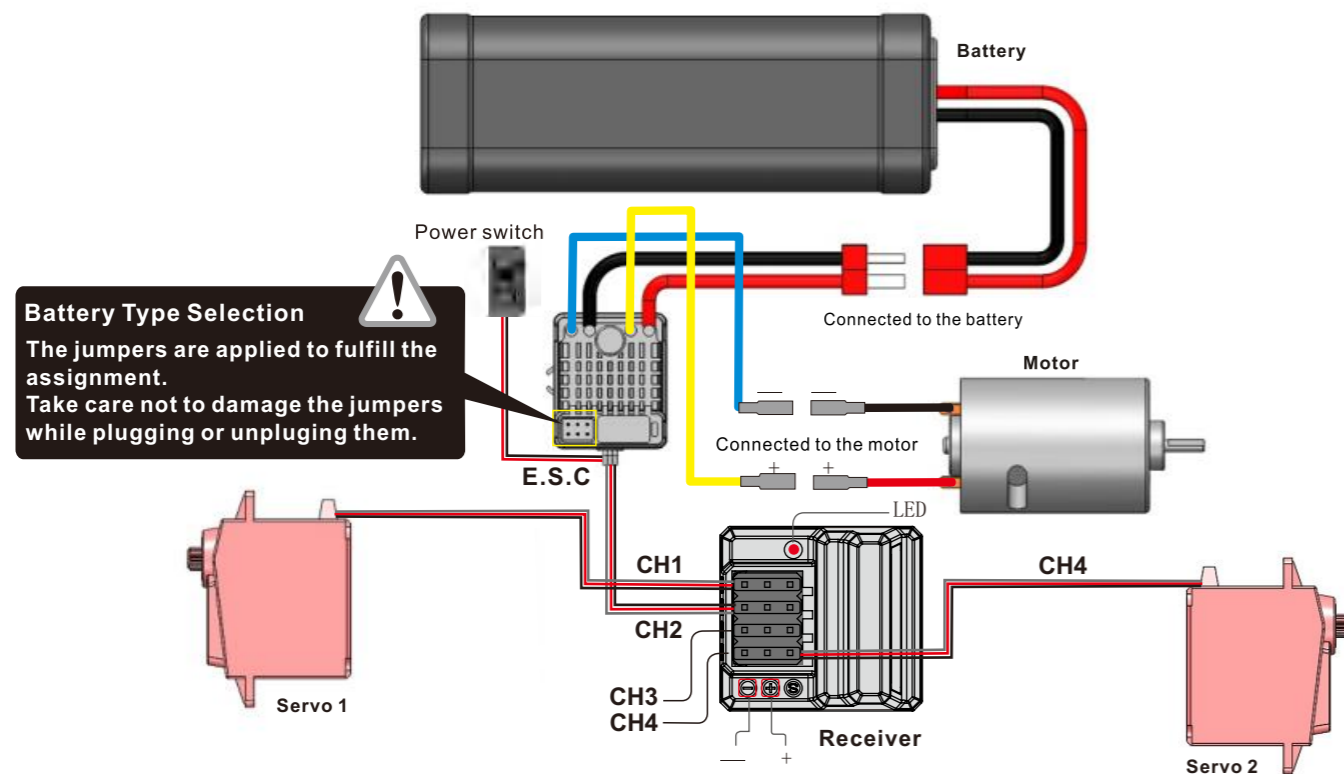

6-1. 2.4GHZ Radio System


Digital Proportional Radio Control System FS-G4P 4WS

Certification: CE, FCC ID: N4Z G4P00

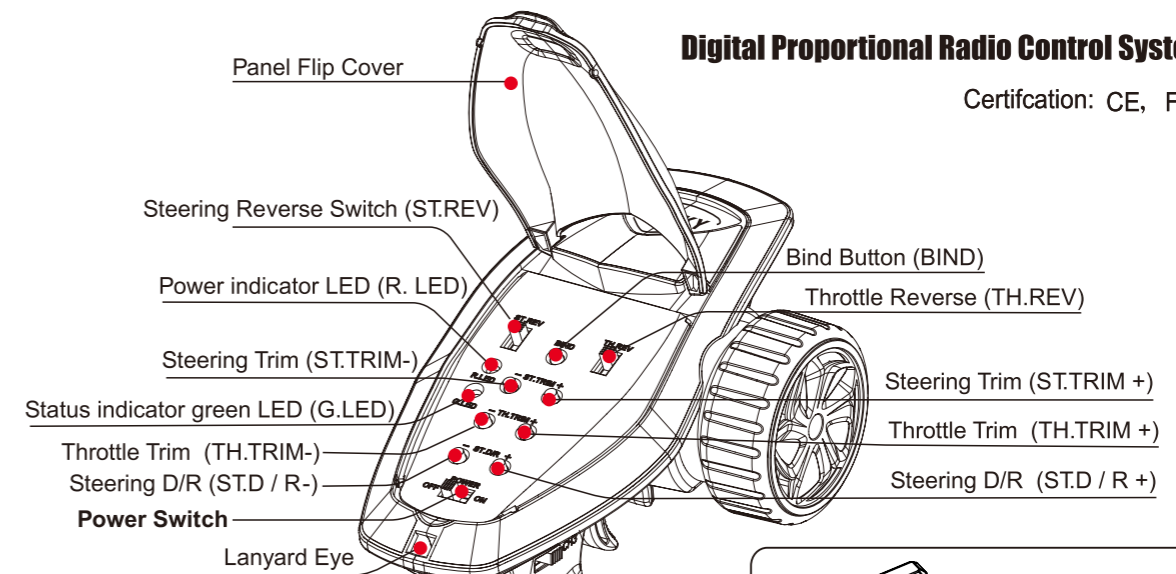

Specification:

Antenna Type: Built-in single antenna
 RF Power: <20dBm
 2.4GHz Protoco: ANT
 Distance: >300m (ground)
 Channel Resolution: 1024
 Battery: 6V DC 1.5AA*4
 Low Voltage Warning <4.2V
 Weight: 220g

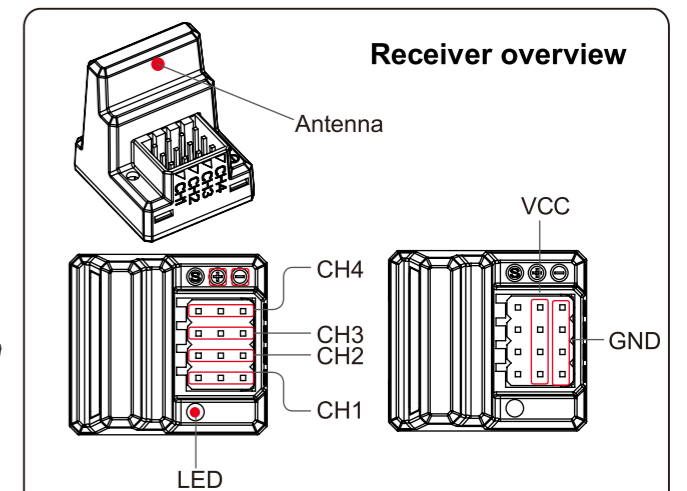

Note

To ensure the best signal quality make sure that the antenna is mounted perpendicular to the model body in an upright position.

Danger

Do not open, disassemble, or attempt to repair the battery.


6-2. Take out the transmitter and load 4AA size batteries.

Battery Installation:


1. Open the battery compartment cover.
2. Insert 4 fully-charged AA batteries into the compartment. Make sure that the battery makes good contact with the battery compartment's contacts.
3. Replace battery compartment cover.



Low battery alarm: When the battery is lower than 4.2v, the G.LED on the panel will flash slowly



Batteries: 4 x 1.5 V "AA" (not included)

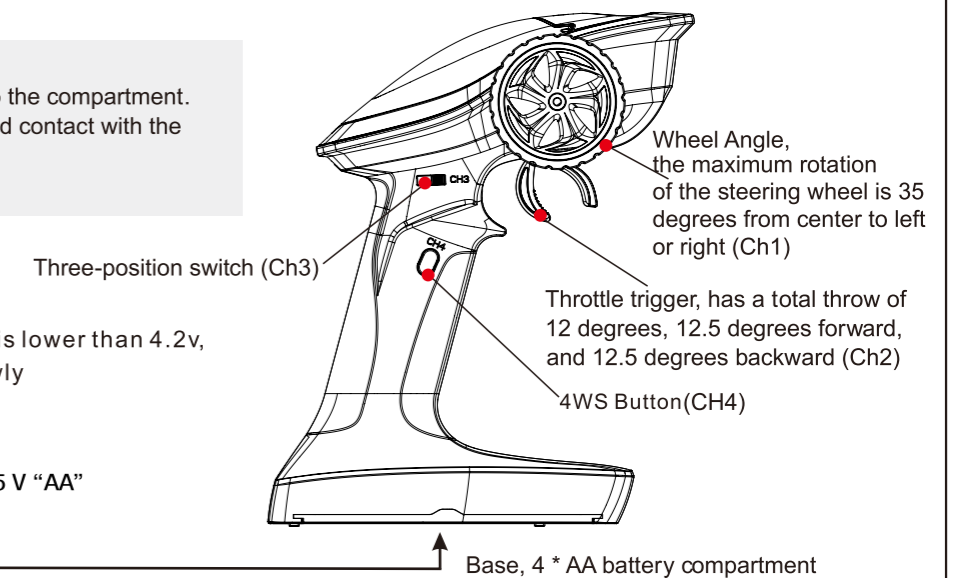

6-3. FS-G4P 4WS Transmitter Instructions

After setting up, follow the instructions below to operate the system.

Power On

Follow the steps below to turn on the transmitter:

1. Check to make sure that that battery is fully charged and installed correctly.
2. Toggle the switch to the [ON] position. When active the R.LED will be lit.
3. Connect the receiver to power.
4. For safety always power on the transmitter before the receiver.

Note ● Operate with caution in order to avoid damage or injury.

Note ● Make sure that the throttle is at its lowest position and the switches are set to their up position.

Binding

The transmitter and receiver have already been bound at the factory.

However if the receiver needs to be replaced or additional receivers bound follow these steps:

1. Turn on the transmitter while holding the bind button to enter bind mode. G.LED will start flashing quickly.
 - Once in bind mode release the bind button.
2. The receiver will enter bind mode atomically when powered on.
3. Once binding is successful the receiver's LED will flash slowly and the transmitter's LED will remain solid after being rebooted.

Note: When binding, put the transmitter into bind mode first, then the receiver.

Beginner Mode

Beginner mode is designed for people new to the hobby. In this mode the throttle will be limited to 50 percent, In this mode the throttle will be limited to 50 percent, The channel range defaults to 1250~1500~1750us.

Setup:

To switch between beginner and normal modes press and hold the channel 4 button as the transmitter is turned on.

Note By default, the system is set to normal mode. The GLED will flash slowly for 3 seconds during power on if the system is set to beginner mode.

Stick Calibration

This function is used to set the neutral position for throttle and wheel. Every transmitter is calibrated before leaving the factory, however if recalibration is required, please follow these steps:

1. Turn and hold the wheel as far clockwise as it will turn, hold the throttle all the way forward, then turn on the transmitter in calibration mode.
 - The R.LED and G.LED will flash twice.
2. Calibrate wheel: Turn the wheel completely clockwise, then completely counterclockwise.
 - When calibration is completed the R.LED will be of.
3. Trigger calibration: Pull the trigger back then forward as far as it will go.
 - When calibration is completed the G.LED will be of.
4. Once calibration is complete press the bind key to save and exit.


Power Off

Follow the steps below to turn off the system:

1. Disconnect the receiver power.
2. Toggle the transmitter's power switch to the off position.


Danger Make sure to disconnect the receiver power before turning of the transmitter. Failure to do so may lead to damage or serious injury.

6-4. Instruction of Transmitter 4-wheel Steering Function

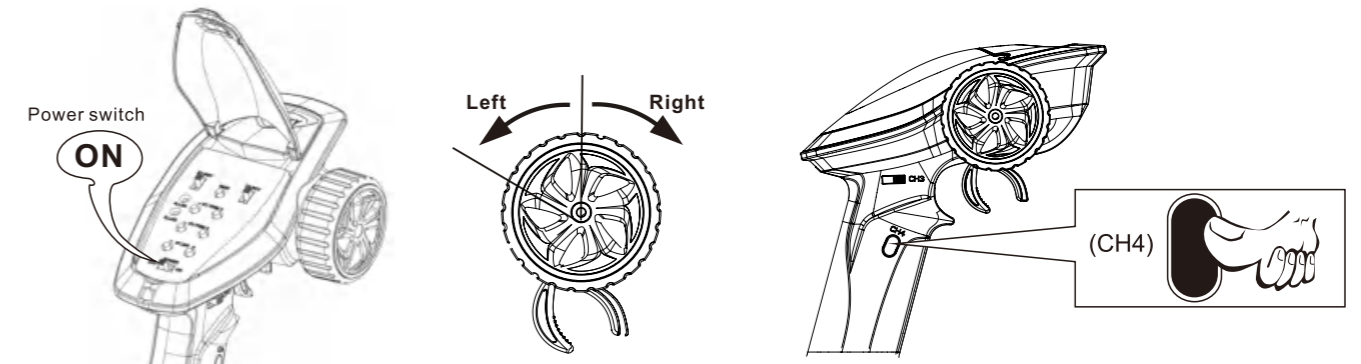


Wheel Angle
the maximum rotation of the Steering wheel is 35 degrees From center to left or right


NOTE: 4-wheel steering function 1-4 could be shifted in cycle. Please pay attention to the front and rear direction of the car when use.

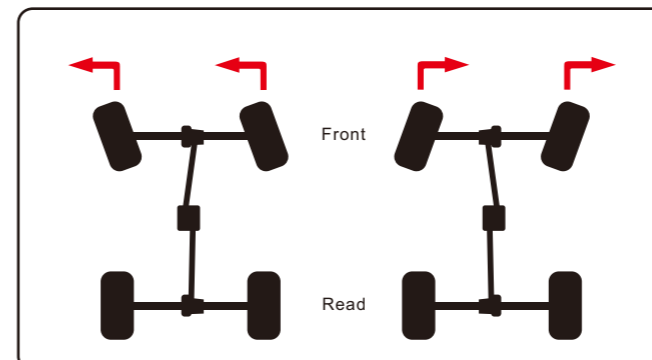


Mode 1: Power on, the original setting is front wheel steering.

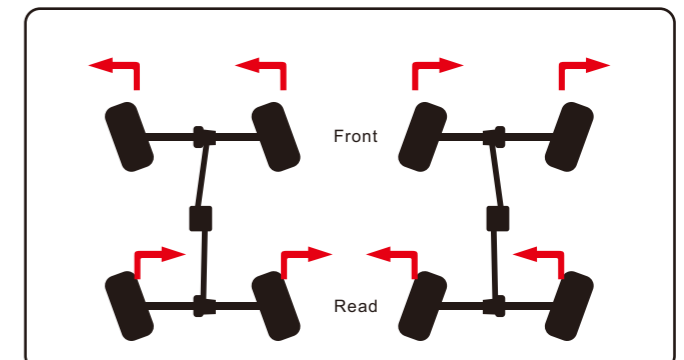

Mode 2: Power on, press CH4 button one time, the front and rear wheel will turn in same direction.

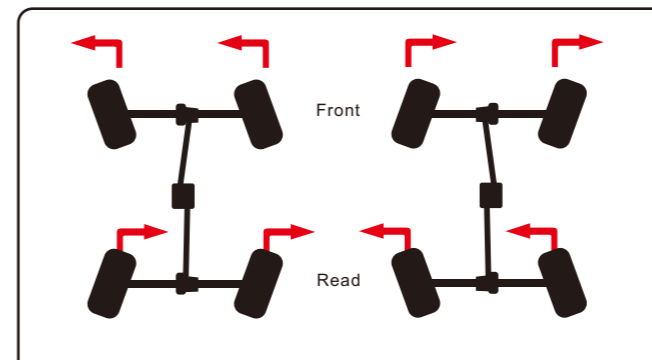



Model 3: Power on, press CH4 button twice, the front and rear wheel will turn in different direction.

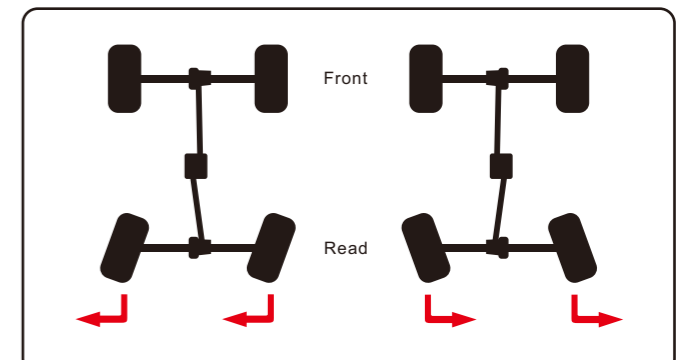

Model 4: Power on, press CH4 button three times, the rear wheels turn. Then press CH4 button once, the front steering recover.




6-5. Transmitter steering trim and throttle trim

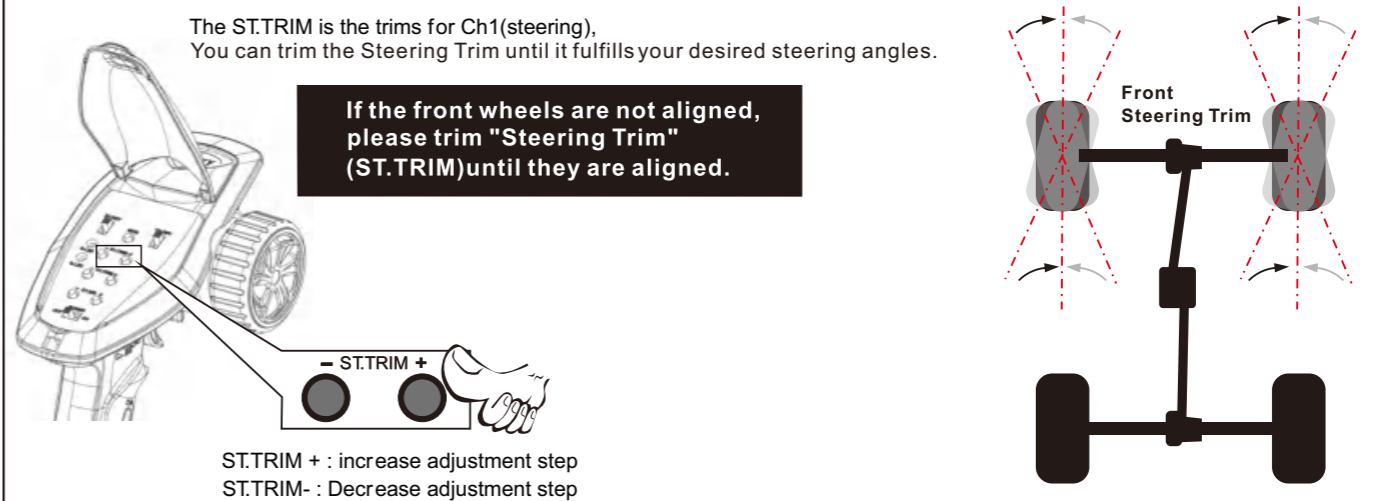



Throttle trigger,
has a total throw of 12 degrees,
12.5 degrees forward,
and 12.5 degrees backward
The heavier you pull or push
the trigger, the faster acceleration
will be.

Note: Release the throttle trigger button,
activate the brake mode automatically.
(Only for Crawler)

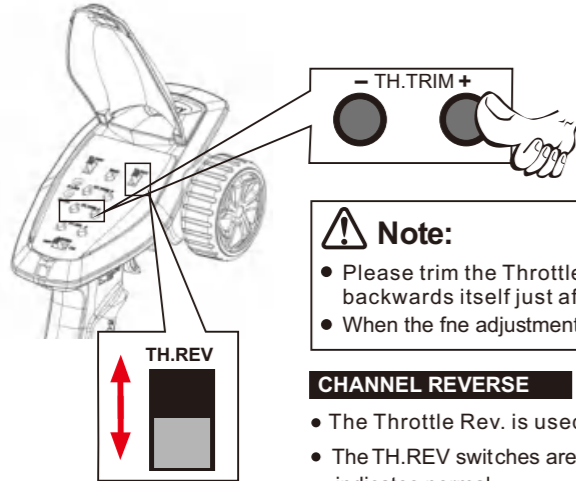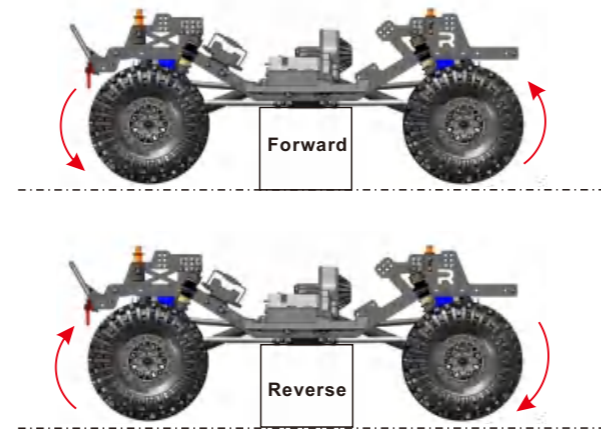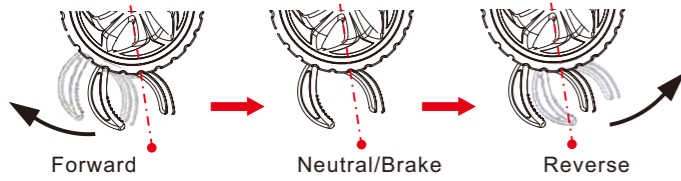




TH.TRIM +: increase adjustment step
TH.TRIM -: Decrease adjustment step
TH.TRIM is the trims for CH2(throttle). Adjustment range: -120us- + 120us,
each step is 4us.

Note:



- Please trim the Throttle Trim (TH. Trim) until the vehicle stops in case the vehicle goes forwards or backwards itself just after it is turned on.
- When the fine adjustment value is at the midpoint, The G.LED will flash twice slowly.

CHANNEL REVERSE

- The Throttle Rev. is used to reverse the direction of motor rotation.
- The TH.REV switches are the reverse buttons for Ch2. If the switch is up it indicates reverse, and the down indicates normal.

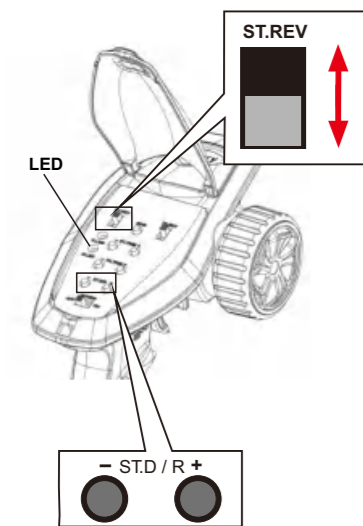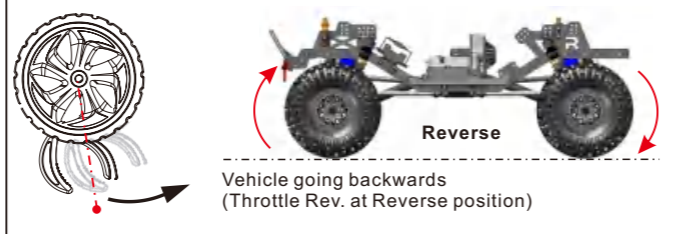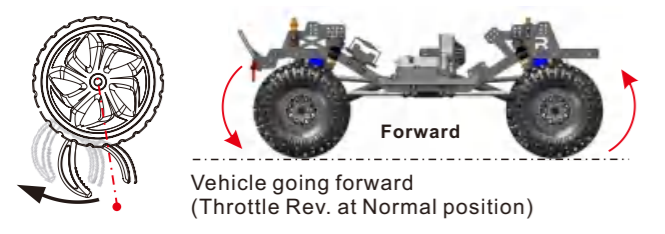

- Steering Trim(ST. Rev) is used to reverse the direction of servo movement.
- The ST.REV switches are the reverse buttons for Ch1. If the switch is up it indicates reverse, and the down indicates normal.

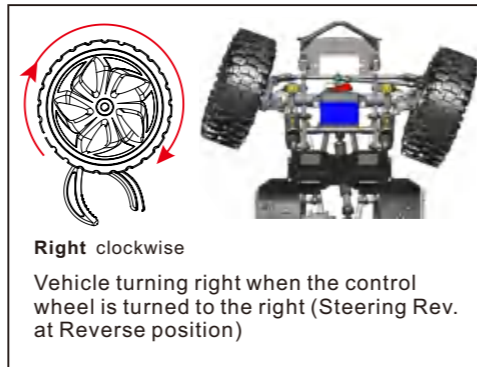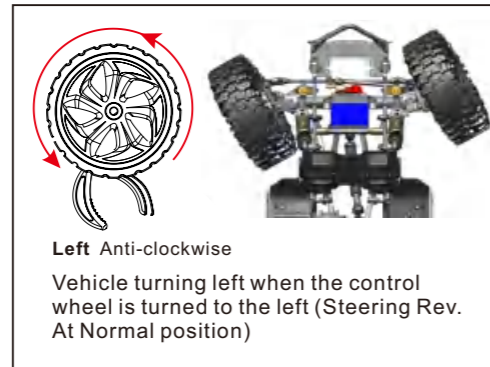


LED Indicator:

- When using the trim keys the G.LED will flash slowly on short presses and quickly on long presses.
- When the ratio value is at both ends (0/120%), the ST.D / R button is at its maximum and as such G.LED will not flash (if the ratio value has been adjusted to 120%, then press ST.D/R+key is invalid and G.LED has Instructions)

ST.D / R +: increase servo travel.
ST.D / R -: decrease servo travel.

ST.D / R is for servo travel adjustment, which can be multiplexed as CH2 (throttle), CH3, CH4 servo travel adjustment.
Adjustment range: 0-120%(the default is 100%), the step is 5%.



Mode switching This function is for reusing the ST.TRIM and ST.D / R buttons for different channels .

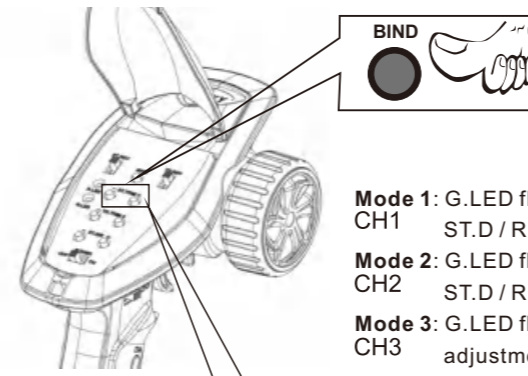

Function setting:
Under normal power-on, quickly press the Bind button twice (within 1 Sec) to cycle through modes 1, 2, 3, and 4.

Note • The default setting when powering on is Mode 1.


- Mode 1:** G.LED flashes slowly once, ST.TRIM is CH1 fine adjustment , CH1 ST.D / R is ser vo travel adjustment.
- Mode 2:** G.LED flashes twice slowly, ST.TRIM is CH1 fine adjustment , CH2 ST.D / R is CH2 ser vo travel adjustment.
- Mode 3:** G.LED flashes three times slowly, ST.TRIM is CH3 fine adjustment , ST.D / R is CH3 ser vo travel adjustment.




ST.TRIM + : increase adjustment step
ST.TRIM - : Decrease adjustment step

Mode 4: G.LED flashes slowly four times, ST.TRIM is CH4 fine adjustment , CH4 ST.D / R is CH4 ser vo travel adjustment.

Beginner Mode

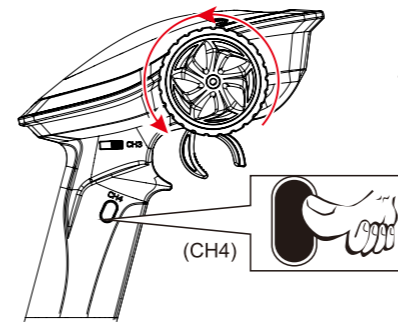

Beginner mode is designed for people new to the hobby. In this mode the throttle will be limited to 50 percent, The channel range defaults to 1250~1500~1750us.

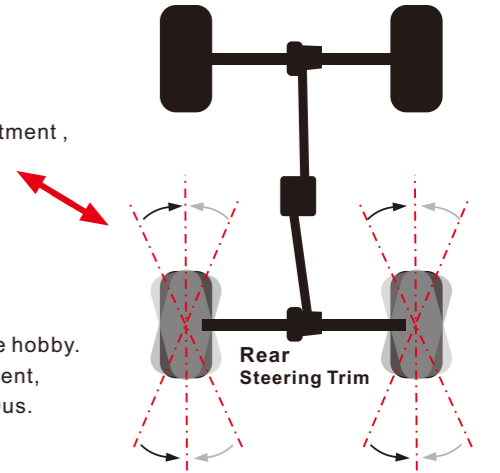

Setup: To switch between beginner and normal modes press and hold the channel 4 button as the transmitter is turned on.

Note:
By default, the system is set to normal mode. The GLED will flash slowly for 3 seconds during power on if the system is set to beginner mode.


Failsafe

This function dictates what the receiver will do in the event that it loses signal from the transmitter, this includes servo position etc.

Setup:

1. Turn on the transmitter and make sure it is connected to the receiver.
2. Hold the control surface at the desired failsafe position.
3. Press and hold the bind button for 3 seconds, if the G.LED starts flashing every 2 seconds then setup has been successful. Failsafe is now set and will default to these values when the receiver loses signal.

Note: The fail-safe function has no default set at the factory and as such must be set manually. If no failsafe setting has been set, then the receiver will not output anything when signal is lost.

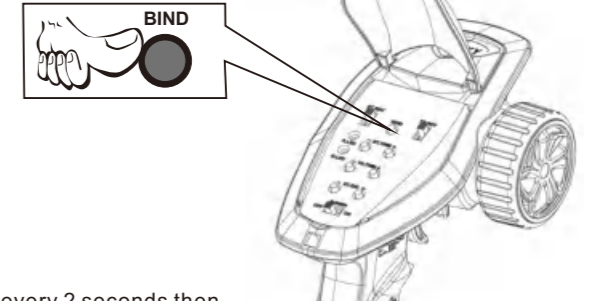

7. All the ways done, your car is ready to run. Hope you enjoy the fun in driving it.


Tip: Always turn off the receiver and then the transmitter when not in use. Clean the car before storage.

Vehicle Maintenance:

- 1). Please remove the battery pack plug or take it out, when the car is out of use.
- 2). Before each use, please redo the above steps and check all the parts condition if over wear.
- 3). Ensure the unused battery pack over-discharge (recommended to be above 40%), and keep in a dry and cool place, out of reach of children.
- 4). After each use, please carefully check all the parts condition, and repair or replace the worn part. Use a fine brush to sweep the sand, marl and other dirt inside the model, then wipe it cleanly by a soft cloth.

8. User Manual of Water-Proof Brushed Speed Controller

WP-1060-BRUSHED

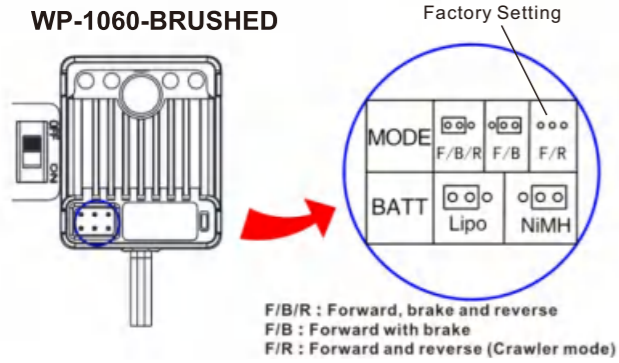

FEATURES

- * Water-proof and dust-proof for all weather races.
- * Small size with built-in capacitor module.
- * Automatic throttle range calibration, easy to use.
- * Multiple protections: Low voltage cut-off protection for Lipo or NiMH battery / Over-heat protection / Throttle signal loss protection.
- * Easily programmed with the jumpers.

Model	WP-1060-BRUSHED	
Cont. / Burst Current	Forward: 60A / 360A Backward: 30A / 180A	
Input	2-3S Lipo, 5-9 Cells NiMH	
Cars Applicable	1:10 on-road, off-road 1:10 Crawler, Tank & Boat	
Motor Limit	2S Lipo or 5-6 cells NiMH	540 or 550 size motor $\geq 8T$ or RPM $< 45000 @ 7.2V$
	3S Lipo or 7-9 cells NiMH	540 or 550 size motor $\geq 13T$ or RPM $< 30000 @ 7.2V$
Resistance	Fwd: 0.0008Ohm, Bwd : 0.0016Ohm	
Built-in BEC	3A/6V (Switch mode BEC)	
Dimension & Weight	36*30*18, 40g	



Attention: The incorrect polarity will damage the ESC immediately. If the motor runs in the opposite direction, please swap these two wire connections.

[PROTECTION FUNCTIONS]

1. Low voltage Cut-off (LVC) protection: If the voltage of battery pack is lower than the threshold for 2 seconds, the ESC will enter the protection mode. When the car stops, the red LED blinks to indicate the low voltage cut-off protection has been activated.

Table A: LVC protection for WP-1060-BRUSHED, (F/B/R or F/B mode).

2S Lipo	3S Lipo	4S Lipo	5-9 cells NiMH
Output reduces 50% at 6.5V Output cuts off at 6.0V, cannot be recovered	Output reduces 50% at 9.75V Output cuts off at 9.0V, cannot be recovered	Output reduces 50% at 13V Output cuts off at 12V, cannot be recovered	Output reduces 50% at 4.5V Output cuts off at 4.0V, cannot be recovered

2. Over-heat protection: When the internal temperature of the ESC is higher than 100 Celsius degree or 212 Fahrenheit degree for 5 seconds, the ESC will reduce and cut off the output power. When the car stops, the red LED blinks to indicate the over-heat protection has been activated. If the ESC cools down to 80 Celsius degree (176 Fahrenheit degree) the output power is recovered to normal state.
3. Throttle signal loss protection: The ESC will cut off the output power if the throttle signal has been lost for 0.1 second. The Fail Save function of the radio system is strongly recommended to be activated.

[TROUBLE SHOOTING]


Trouble	Possible Reason	Solution
After power on, motor can't work, no sound is emitted, and LED is off.	The ESC doesn't get its working voltage; Connections between battery pack and ESC are broken.	Check the battery wires connection or replace the defective connectors.
	Switch is damaged.	Replace the switch.
After power on, motor can't work; red LED blinks.	Throttle signal is abnormal.	Check the throttle wire connection; make sure it is plugged into the throttle channel of the receiver.
	Automatic throttle range calibration is failed.	Set the TRIM of throttle channel to 0 or turn the knob to its neutral position.
The car runs backward while giving throttle. (The motor runs in the opposite direction)	The wire connections between ESC and the motor need to be changed.	Swap two wire connections between the ESC and the motor.
The car can't go backward.	The jumper position is wrong.	Check the jumper and plug it to the correct position.
	The neutral point of throttle channel is changed or drifted.	Set the TRIM of throttle channel to 0 or turn the knob to its neutral position.
The car can't go forward, but can go backward.	The direction of throttle channel is not correct.	Reset the direction of throttle channel from original NOR to REV or from original REV to NOR.

Please review the ESC manual for more details.


9. Troubleshooting

Problem	Possible Cause	Solution
Car does not respond during operation	Electronic plugs loose or fall off	Switch off and reconnect
	Vehicle battery not charged, activating the ESC low voltage cut-off to protect the battery	Replace/recharge the vehicle battery
	Motor or ESC dirty or damaged	replace new Motor (recommend to purchase factory Motor)
	ESC failed	replace new ESC (recommend to purchase factory ESC)
	ESC power off by overheated Motor	Stop operation and cool the ESC or Motor
	Motor overheated, demagnetized or damaged	replace new Motor (recommend to purchase factory Motor)
	Transmitter batteries low or beyond the remote control distance	Replace the transmitter batteries, adjust the remote control distance
	Transmitter damaged	Relace or contact seller
No Backward, forward normally	ESC "operation mode" setting error	Refer to manual "ESC", set "operation mode" into "forward and backward reverse with brake"
	ESC damaged	Relace or contact seller
	Throttle damaged or transmitter throttle not centered	Refer to manual "Transmitter", and reset
Car operate automatically, with no control	Throttle trim out of center on transmitter	Refer to manual "Transmitter", and reset
	Neutral throttle is in incorrect position	Adjust ESC in neutral point
Normal operation, speed shift failure	Error Operation	Ensure to operate in stop status, more refer to the Manual
	Gear Cable damage or loose	Replace the accessory or Readjust
	Servo wire inserts in wrong Receiver slot	Refer to the manual, Readjust
Sluggish Action	Battery damaged / not charged	Check, change or recharge
	Throttle trim out of center on transmitter	Adjust (refer to manual "transmitter")
	Motor dirty/ damaged	Clean/ replace
	Drivetrain dirty / damaged	Check and clean
Light Function Failure after Battery properly installed	Light Plug is not connected or in wrong position	Check the plug connection
	Transmitter Set Error or Light Control Panel Damage	Reset the Transmitter. Otherwise, please check the light control panel is damaged or not.
	Light Cable in wrong installation and connection	Readjust the installation and Connection
Lack of steering and throttle	ESC power off by overheat	Stop operation, cool the ESC
	Transmitter too near interfere electrical objects	Check and rebind transmitter and receiver, refer to manual
Vehicle moves left / right without steering input	Steering accessories damaged	Check and replace
	Wheel loose	Check and replace
	Drivetrain dirty / damaged	Check and replace
Controls Reversed	ST. REV or TH. REV	Change switch position, refer to manual
	Check the wires between ESC and Motor correct or not	Switch the motor black and red wire
Clicking noise in operation	Check the bodyshell damaged or fall off	Retrim or replace
	Loose or tight between motor gear and main gear	Reset gear mesh
	Gear damaged or rocked	Remove gear cover and inspect. If necessary, replace gear
Only steering, no forward and backward	ESC failed or abnormal	Reset the neutral point or replace
	Transmitter failed or abnormal	Relace or contact seller


Transmission Assembly

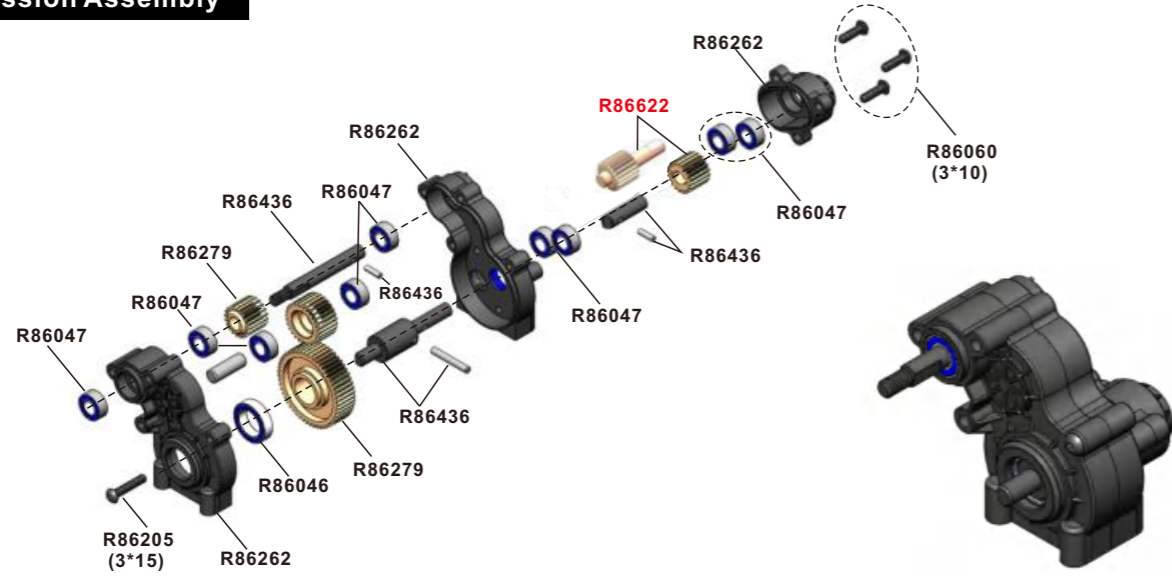


Motor/Transmission Assembly

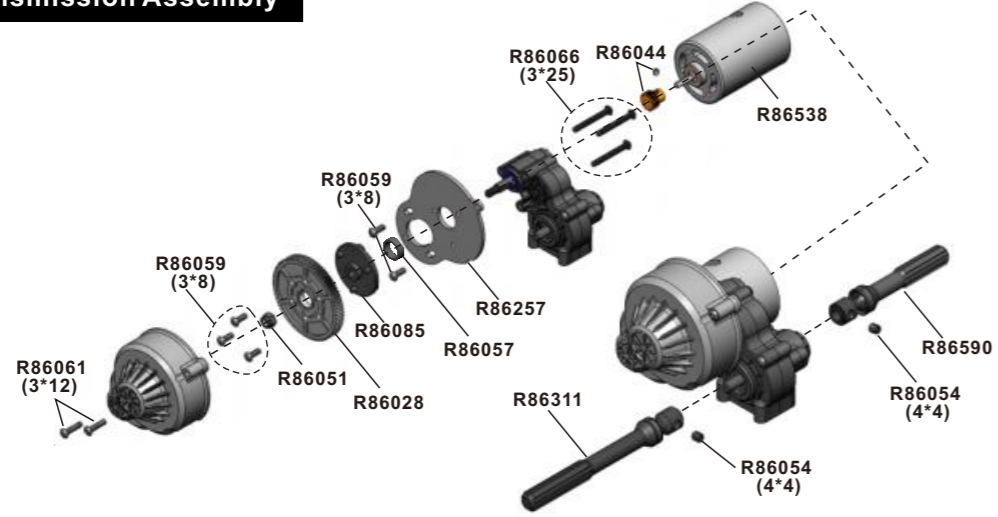


Right Gear Transmission (Front/ Rear)

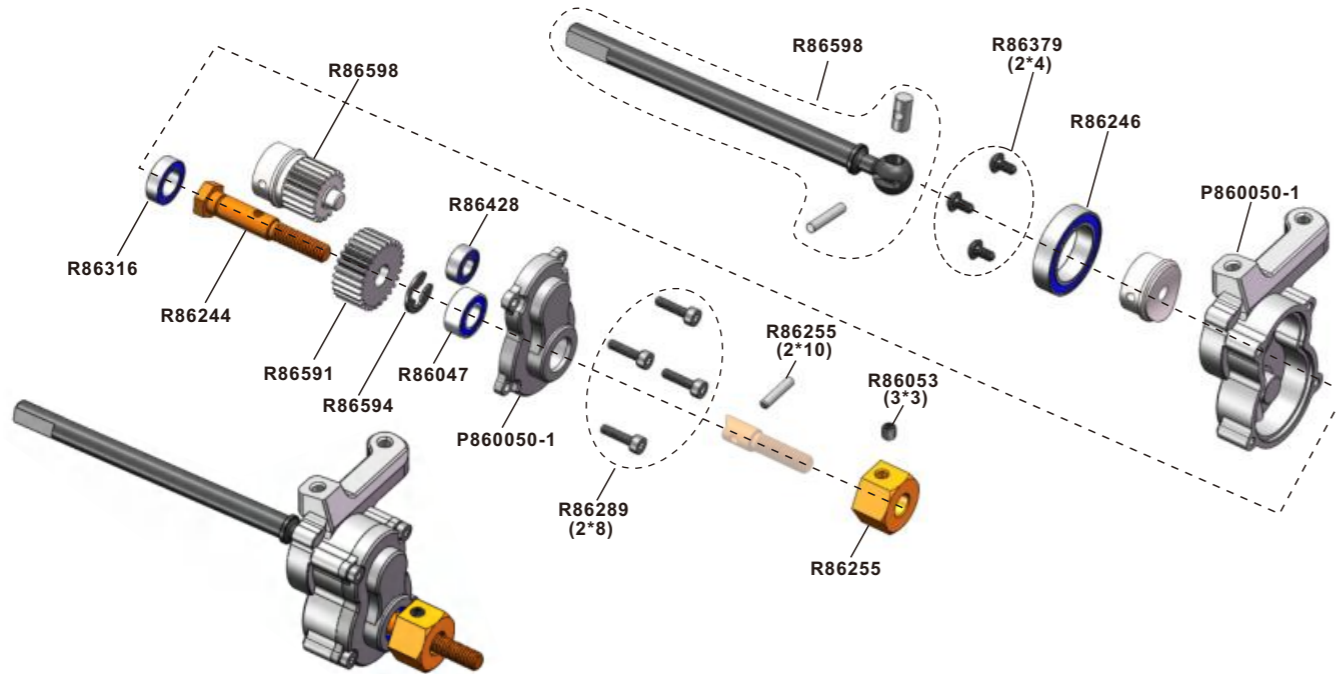


Left Gear Transmission (Front/ Rear)

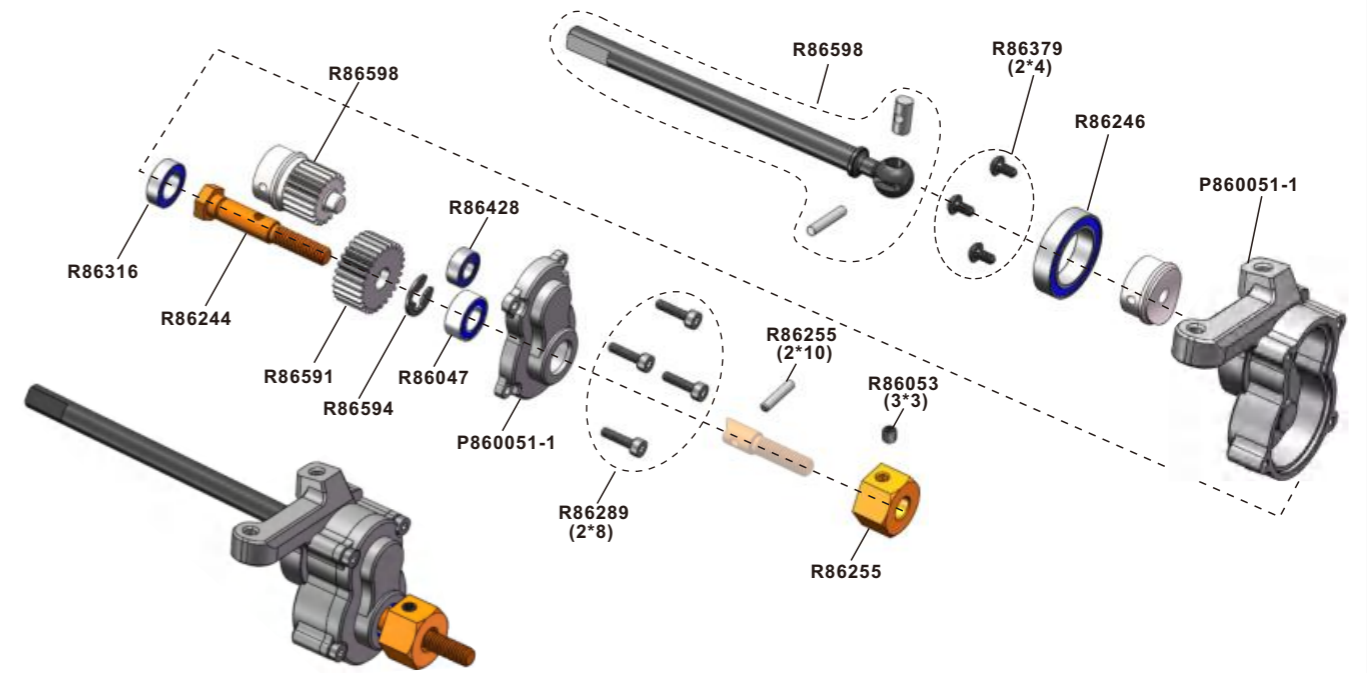


Front Diff. ILLUSTRATION

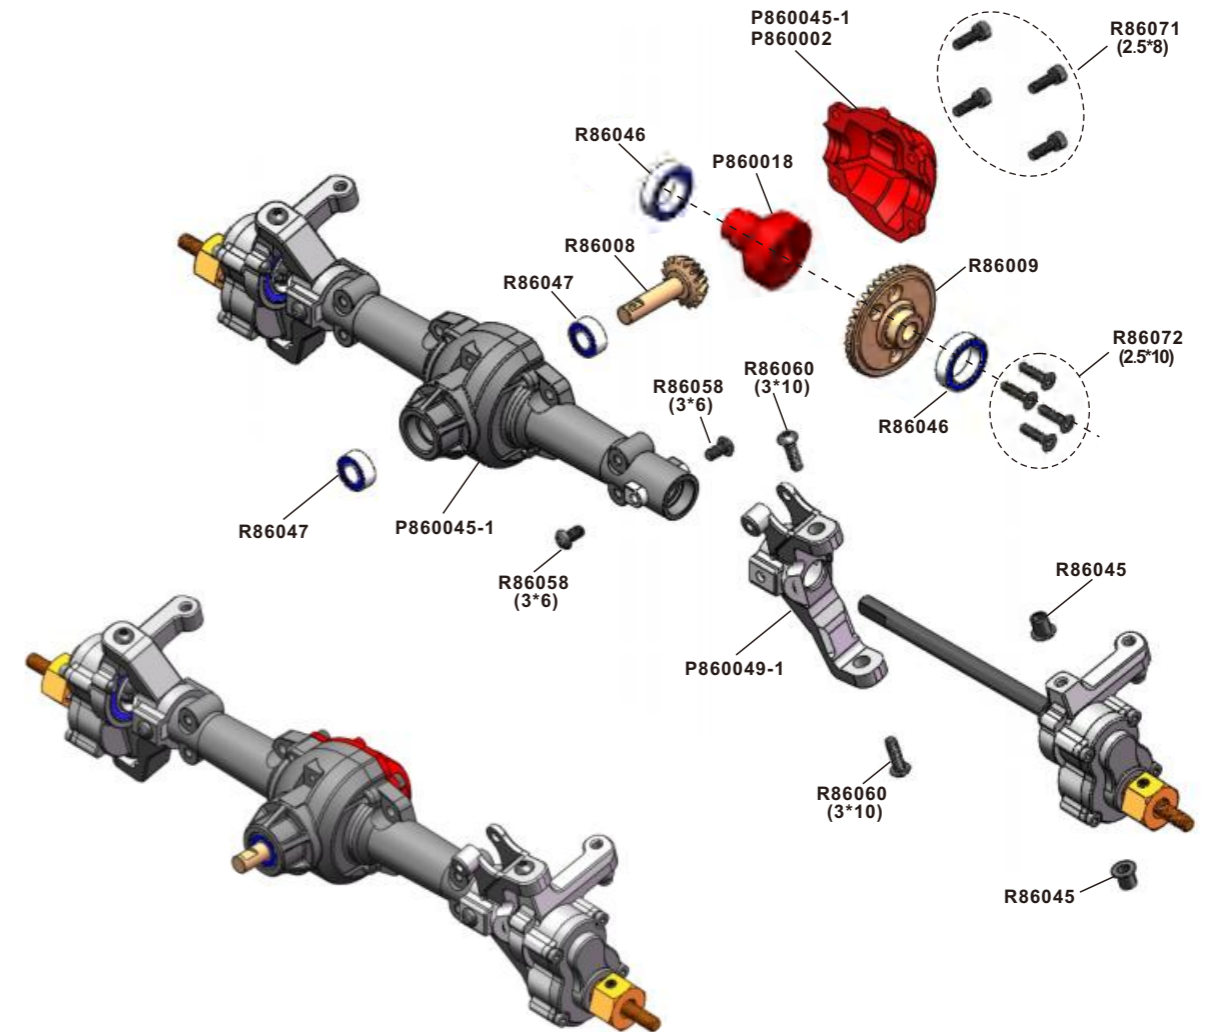


Rear Diff. ILLUSTRATION

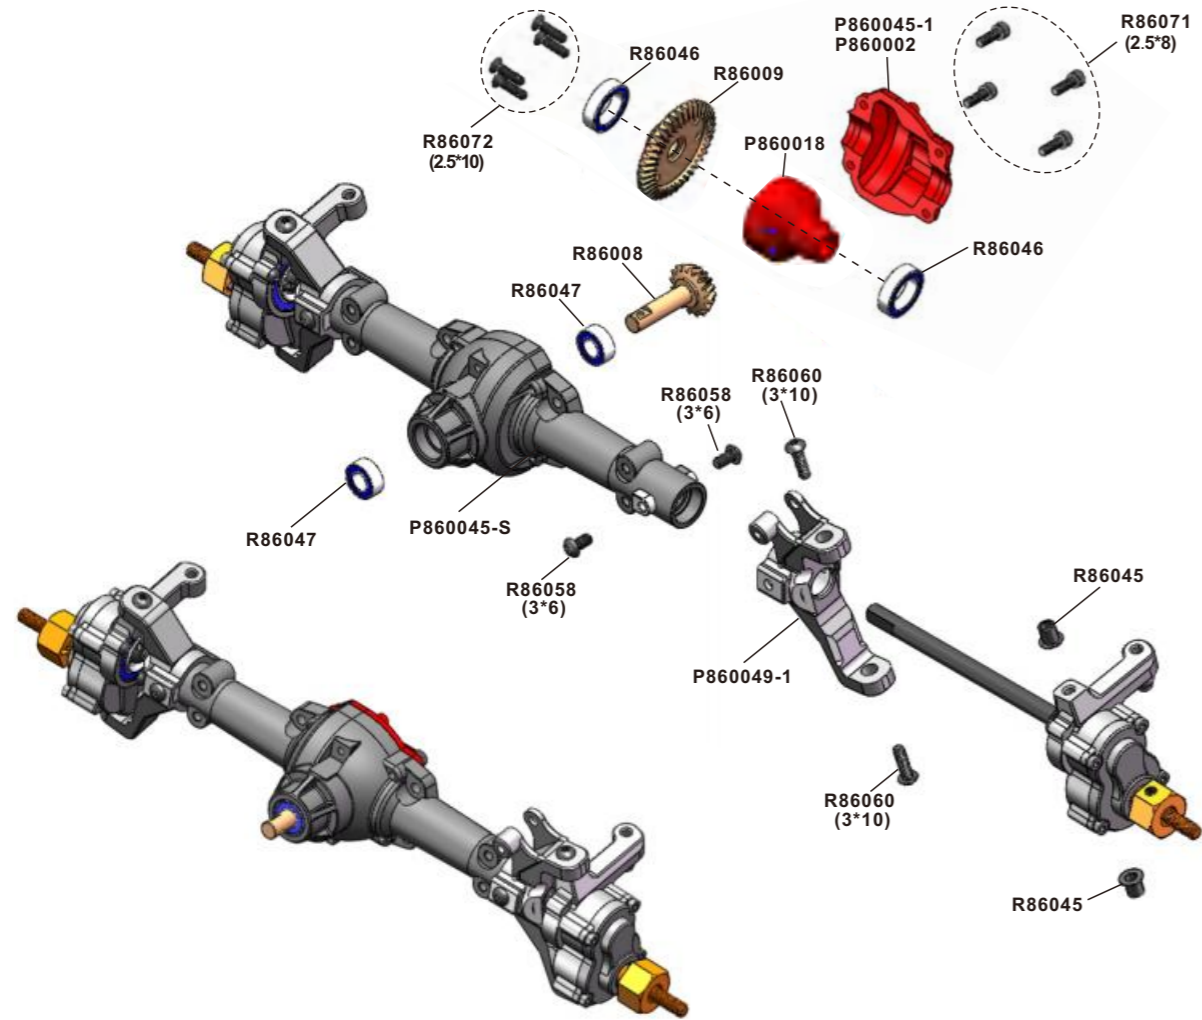


Front/Rear Suspension Linkage Installation

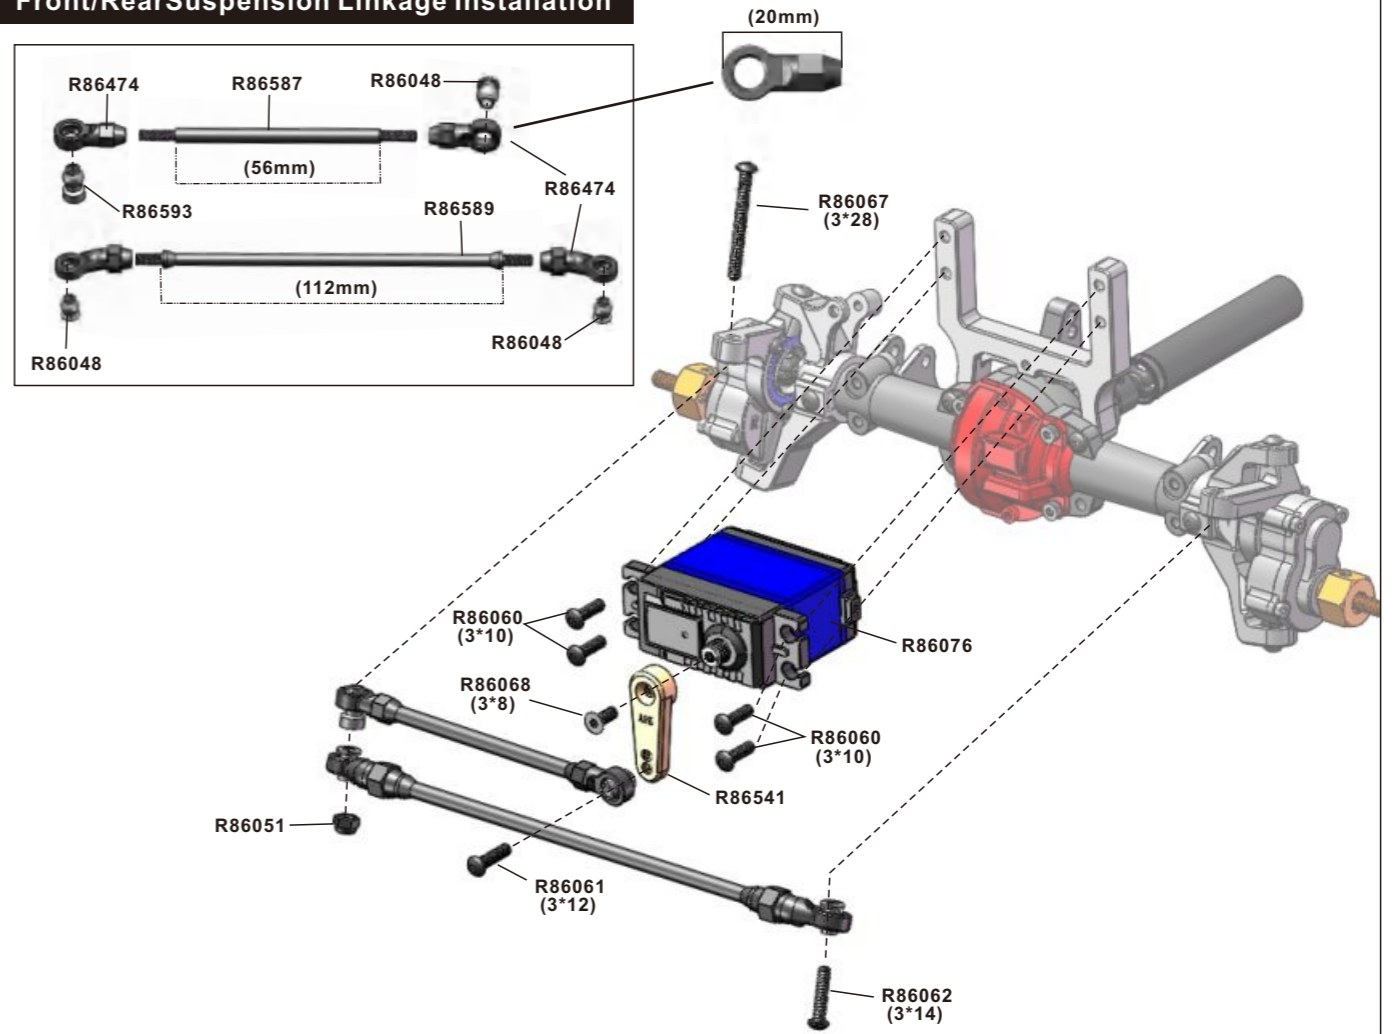


Front Support Plates Assembly

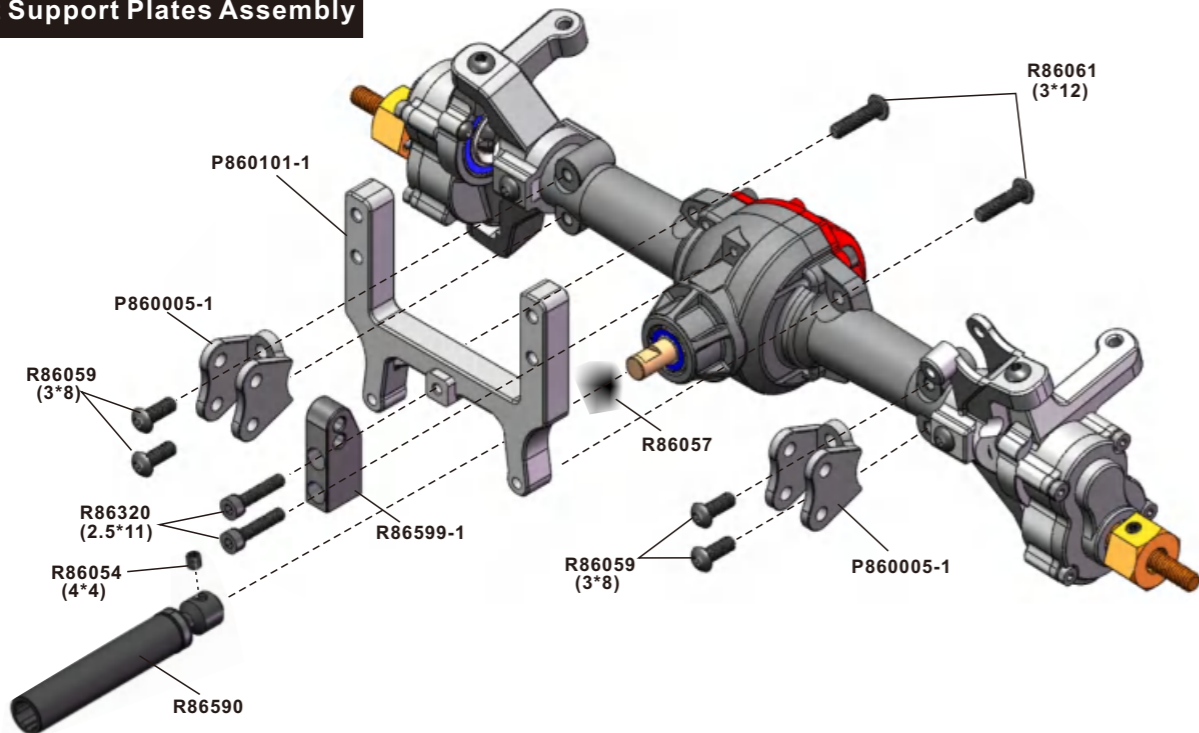


Shock Absorber Assembly

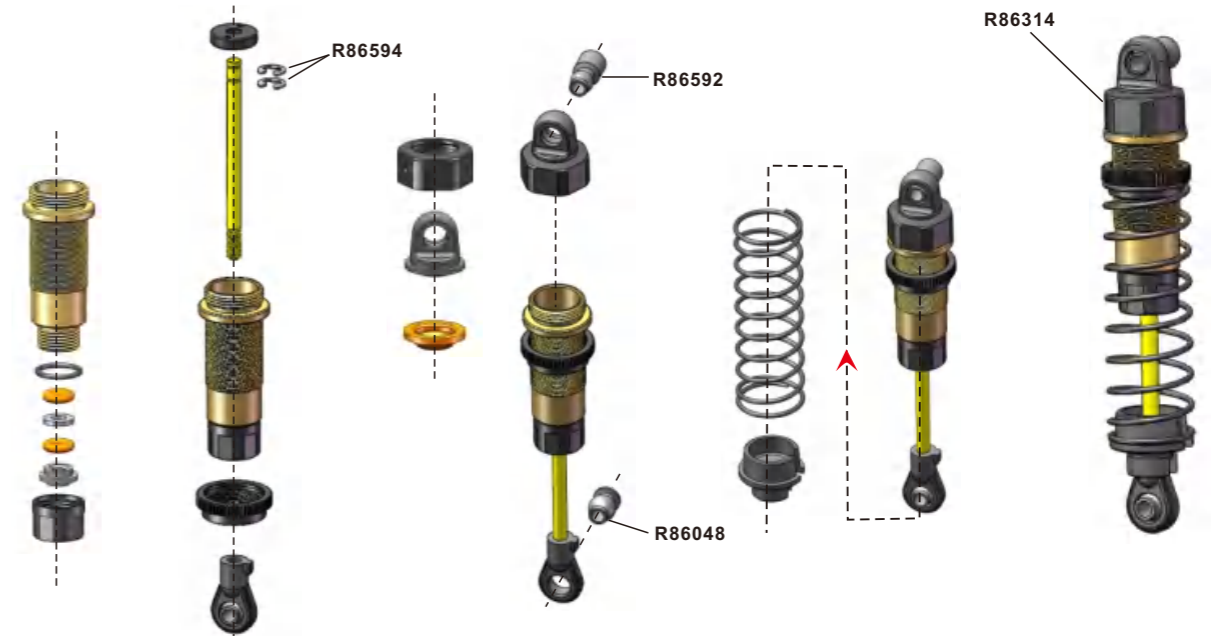


Front/Rear Suspension Linkage Installation

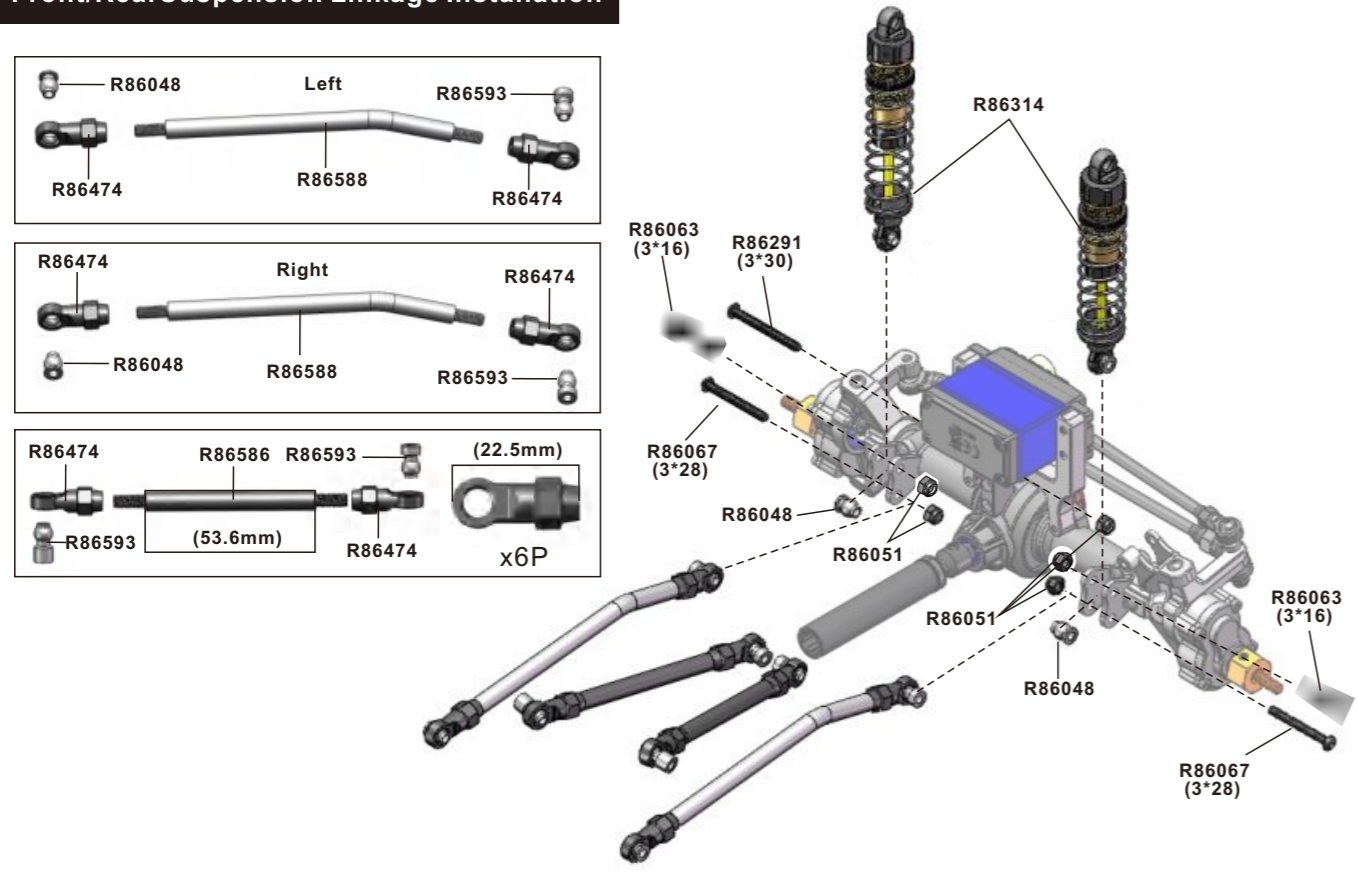


Transfer Case Assembly

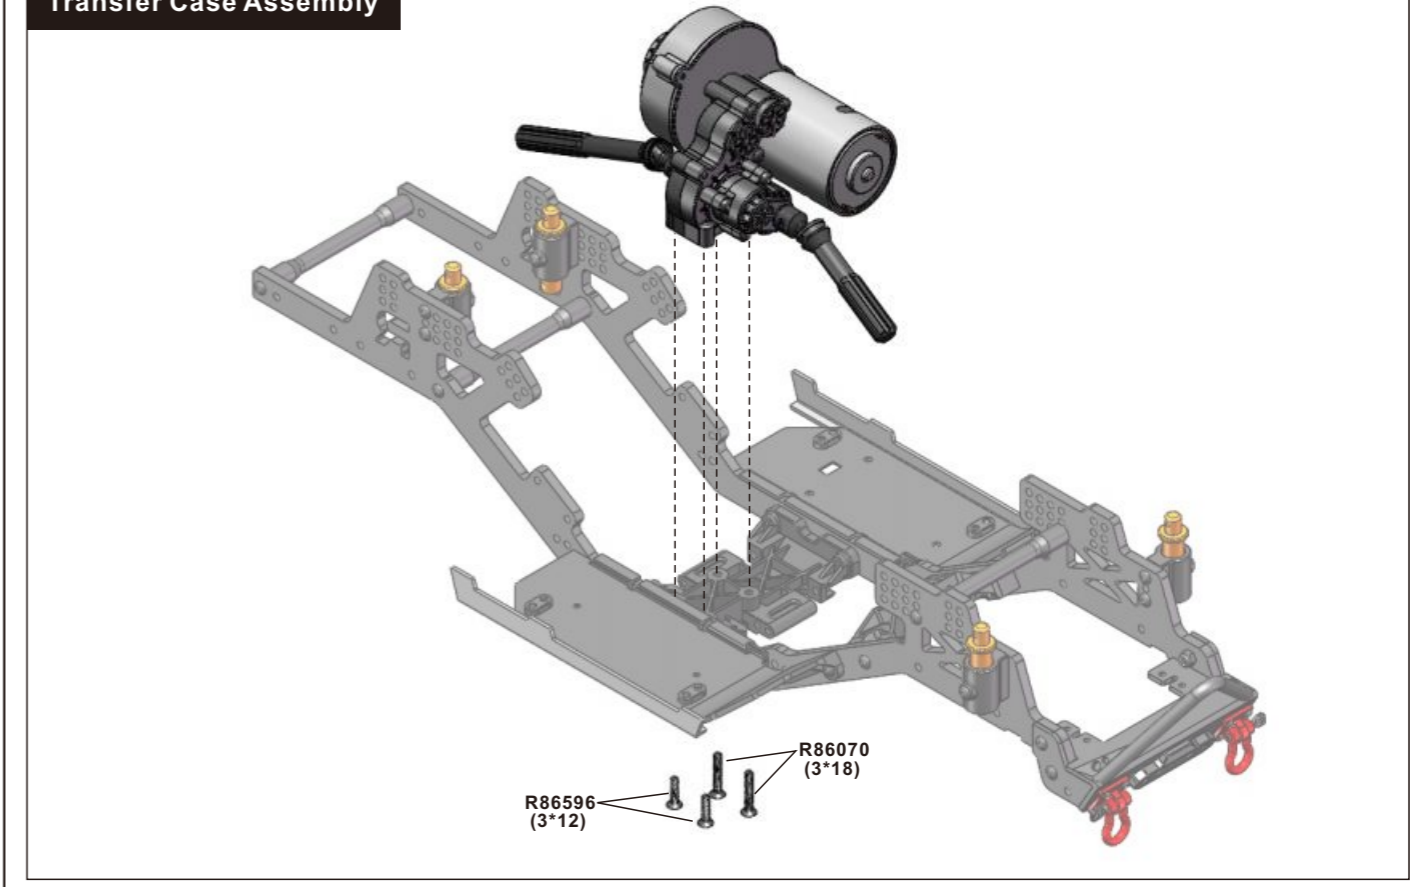


Chassis Rail Assembly

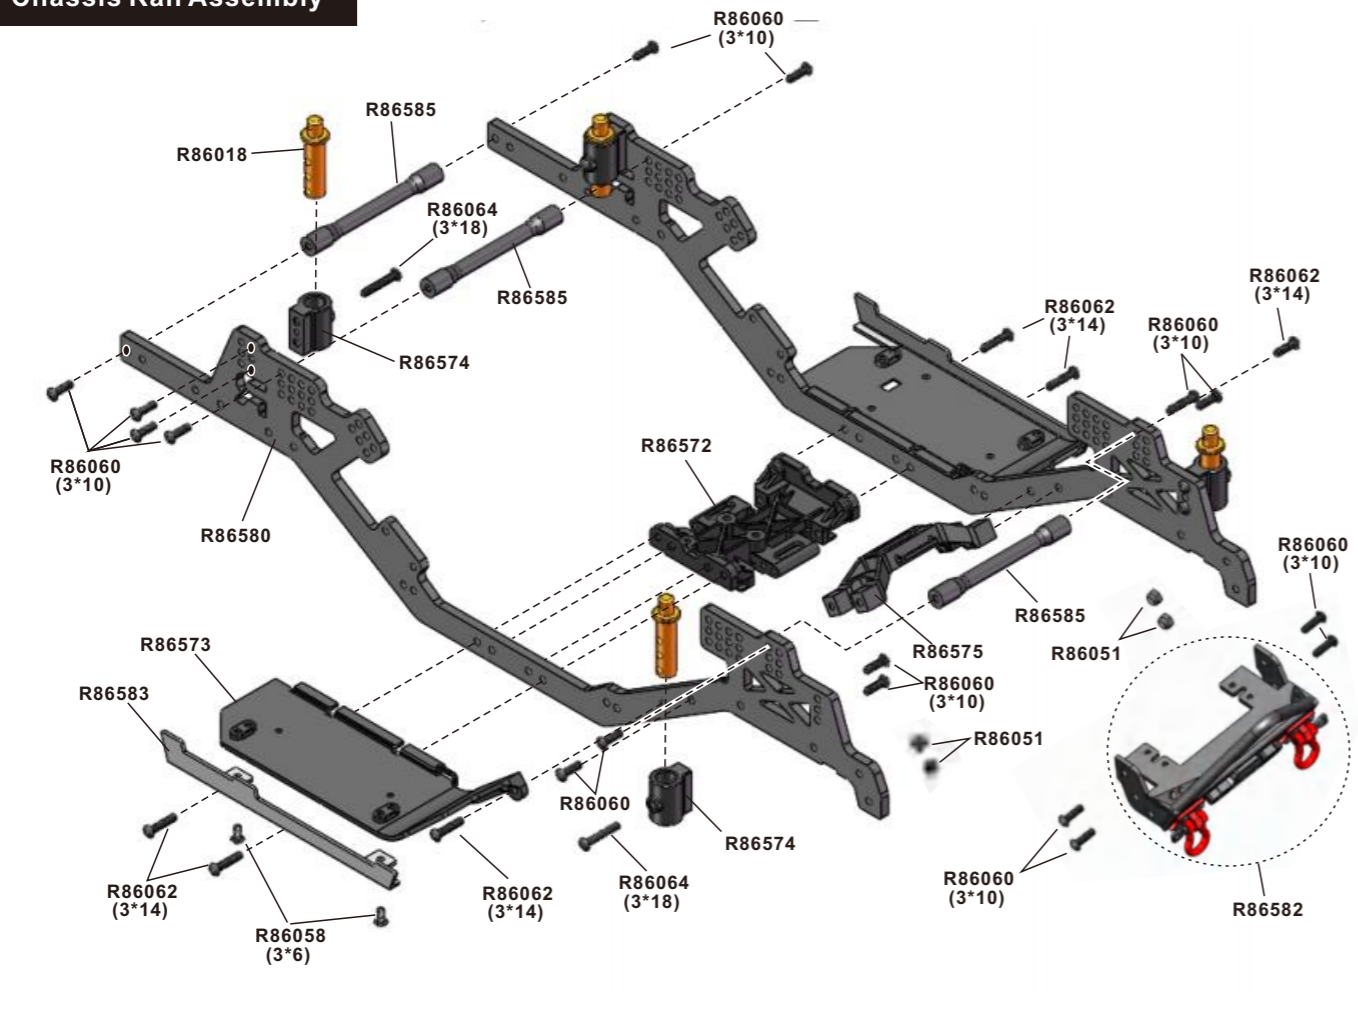


Installing FrontAxle Complete

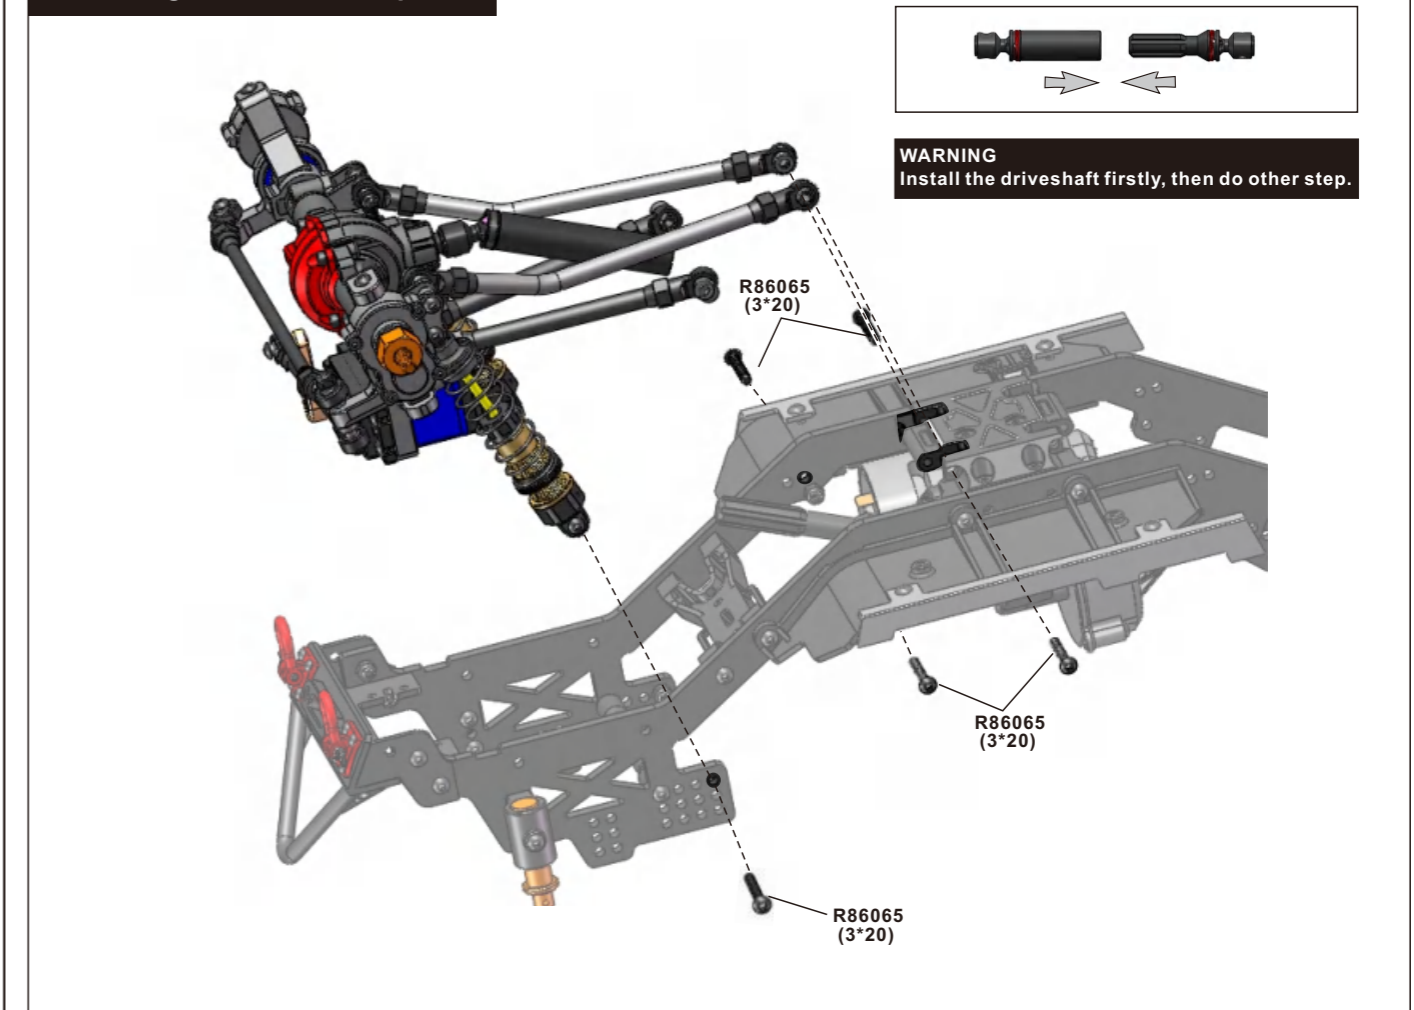


Installing RearAxle Complete

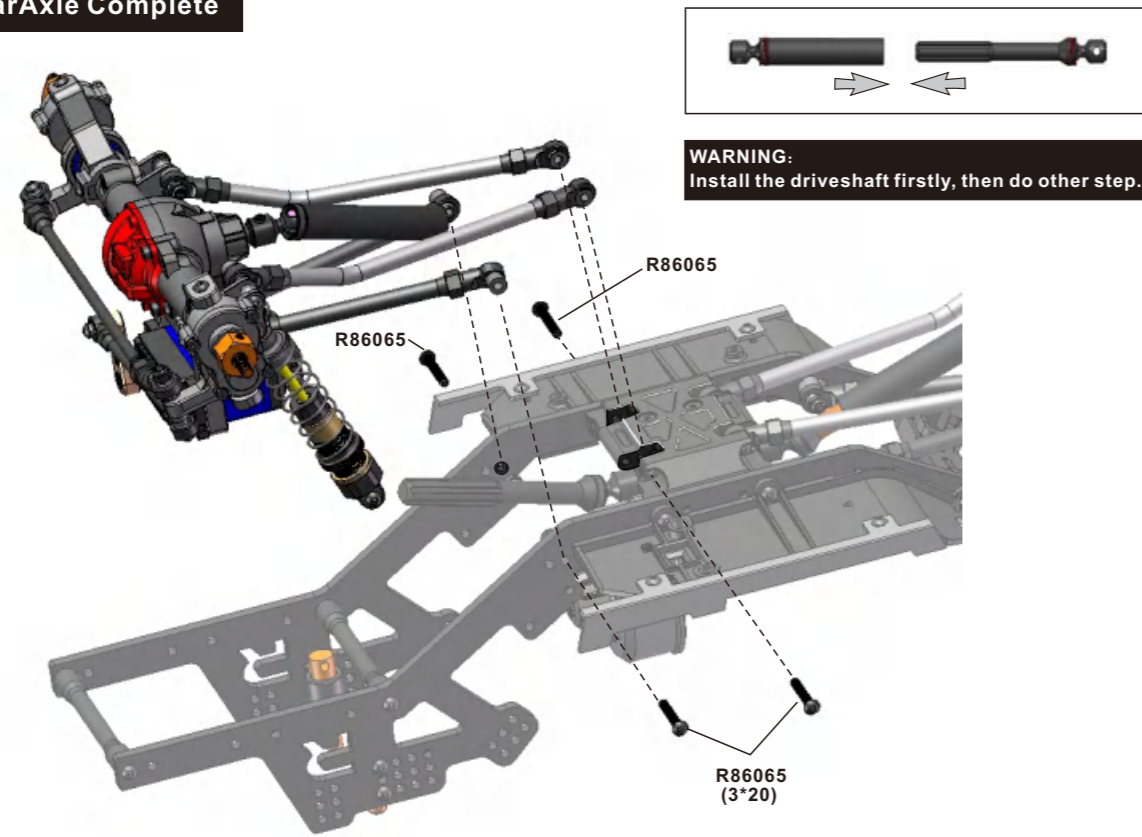


Installing ESC

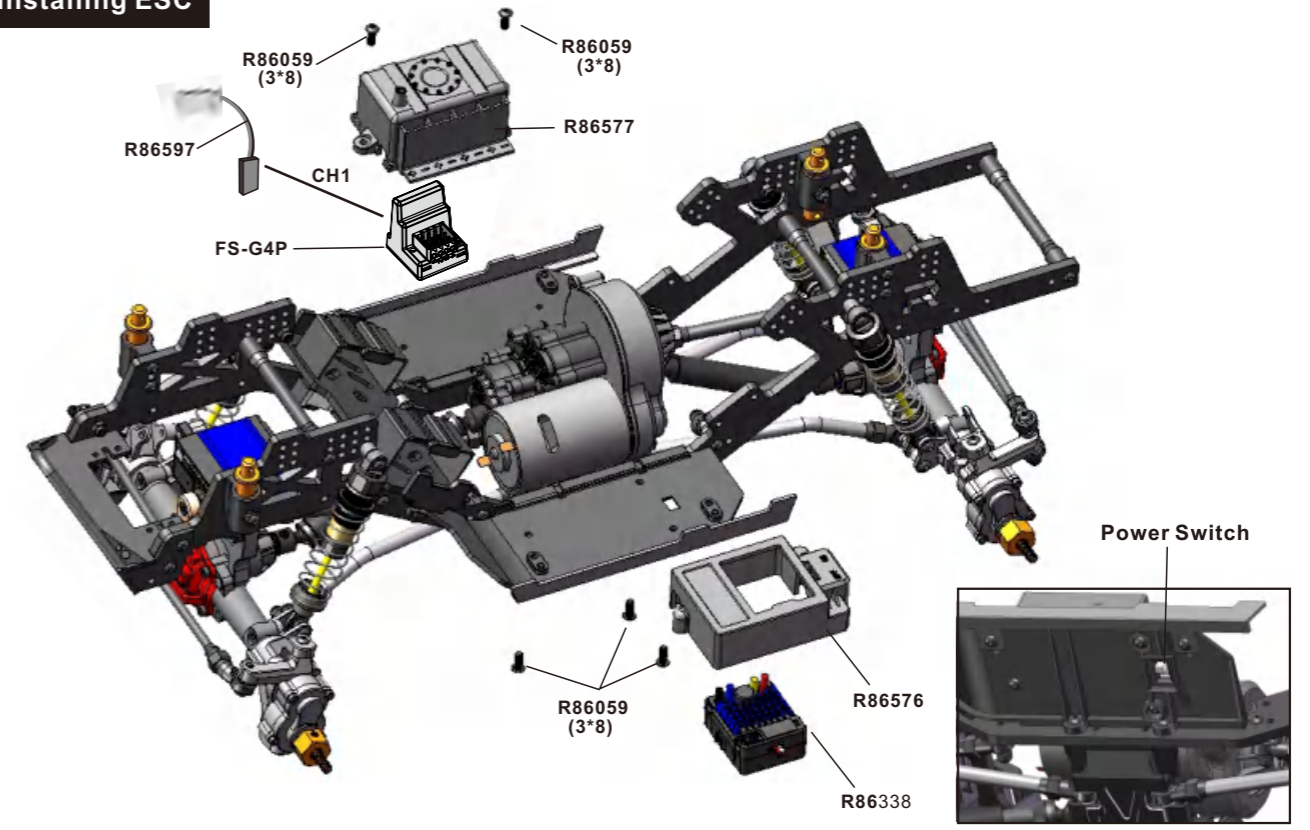


Installing Battery Holder


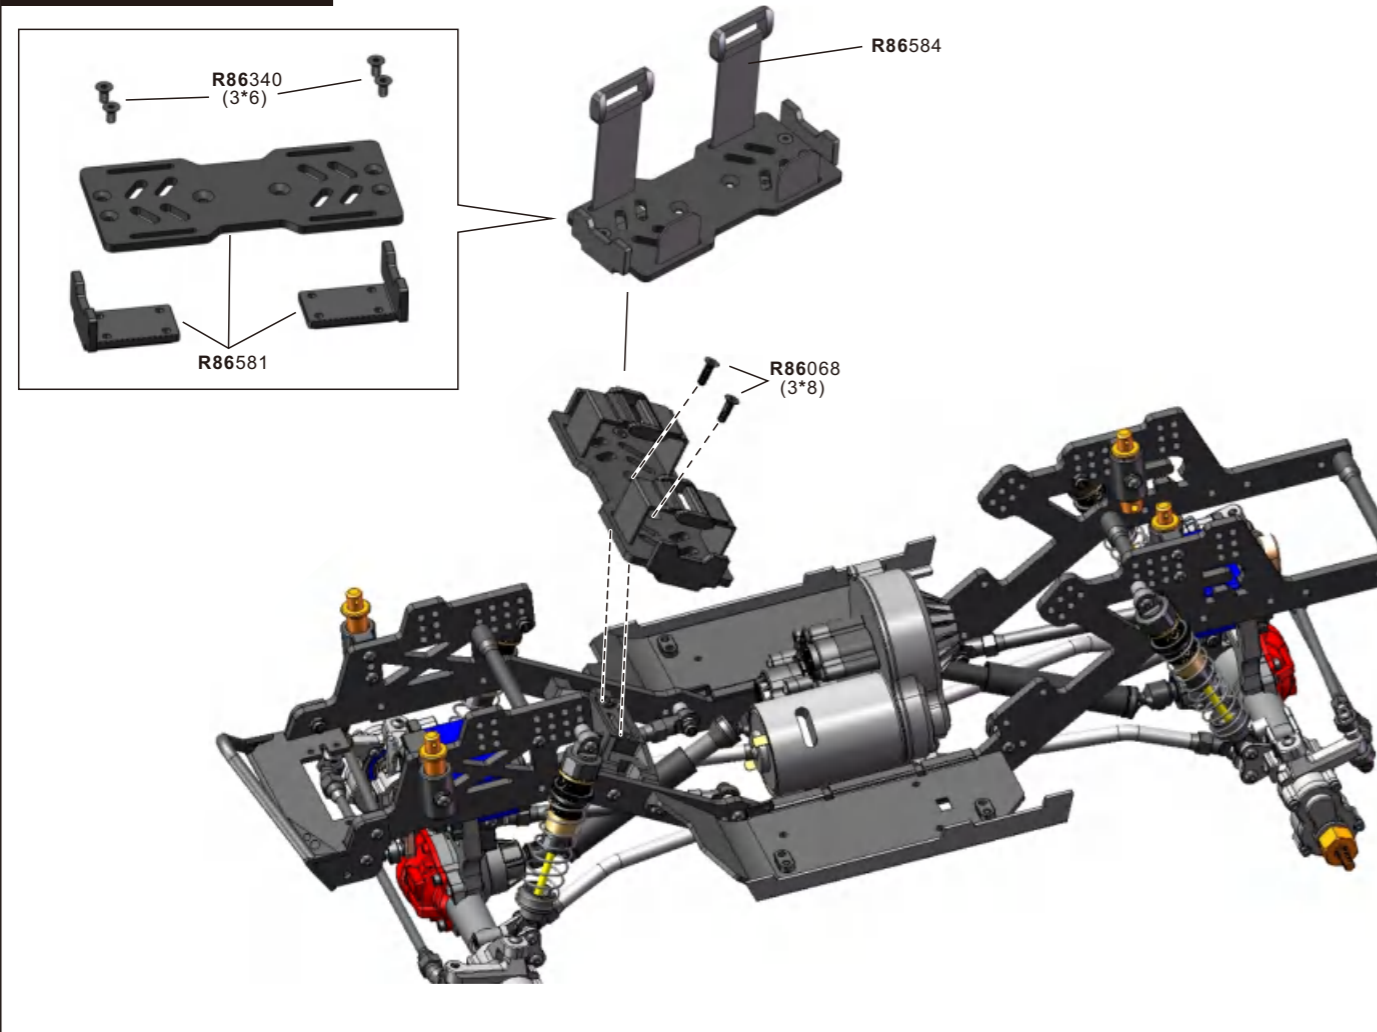


(Left)

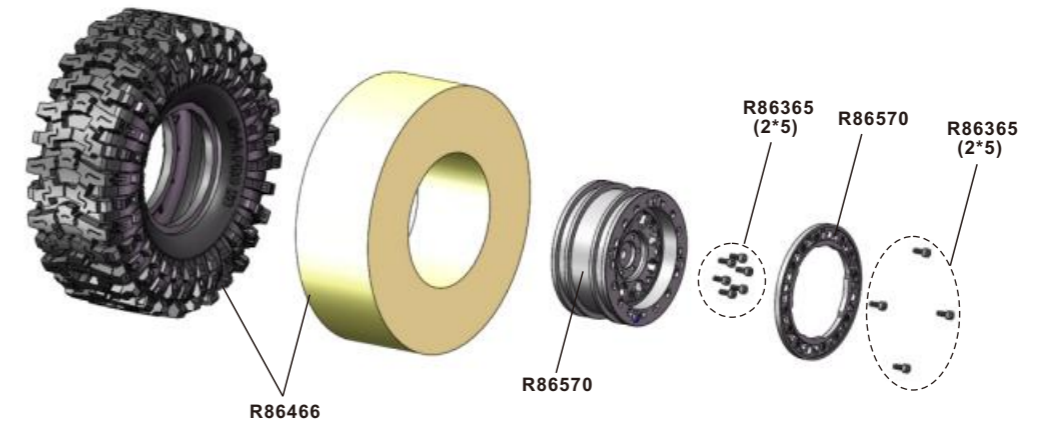





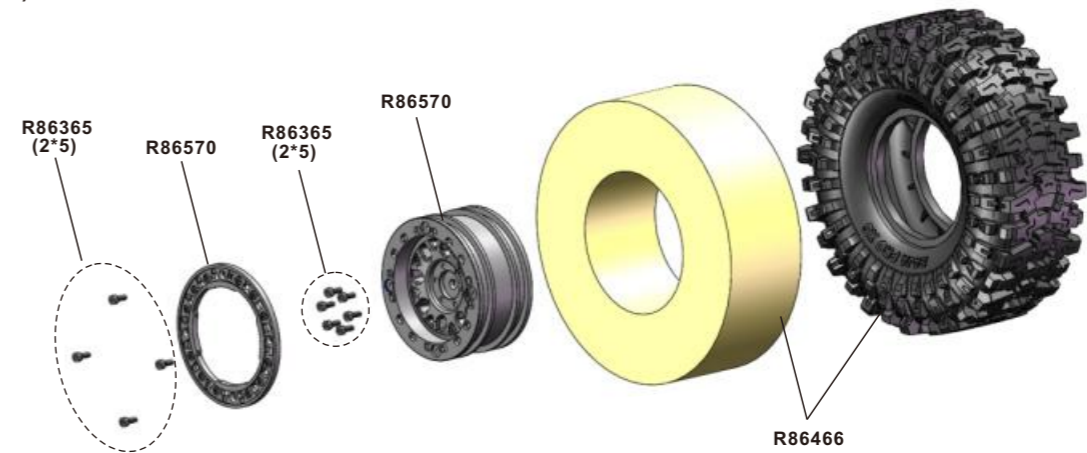

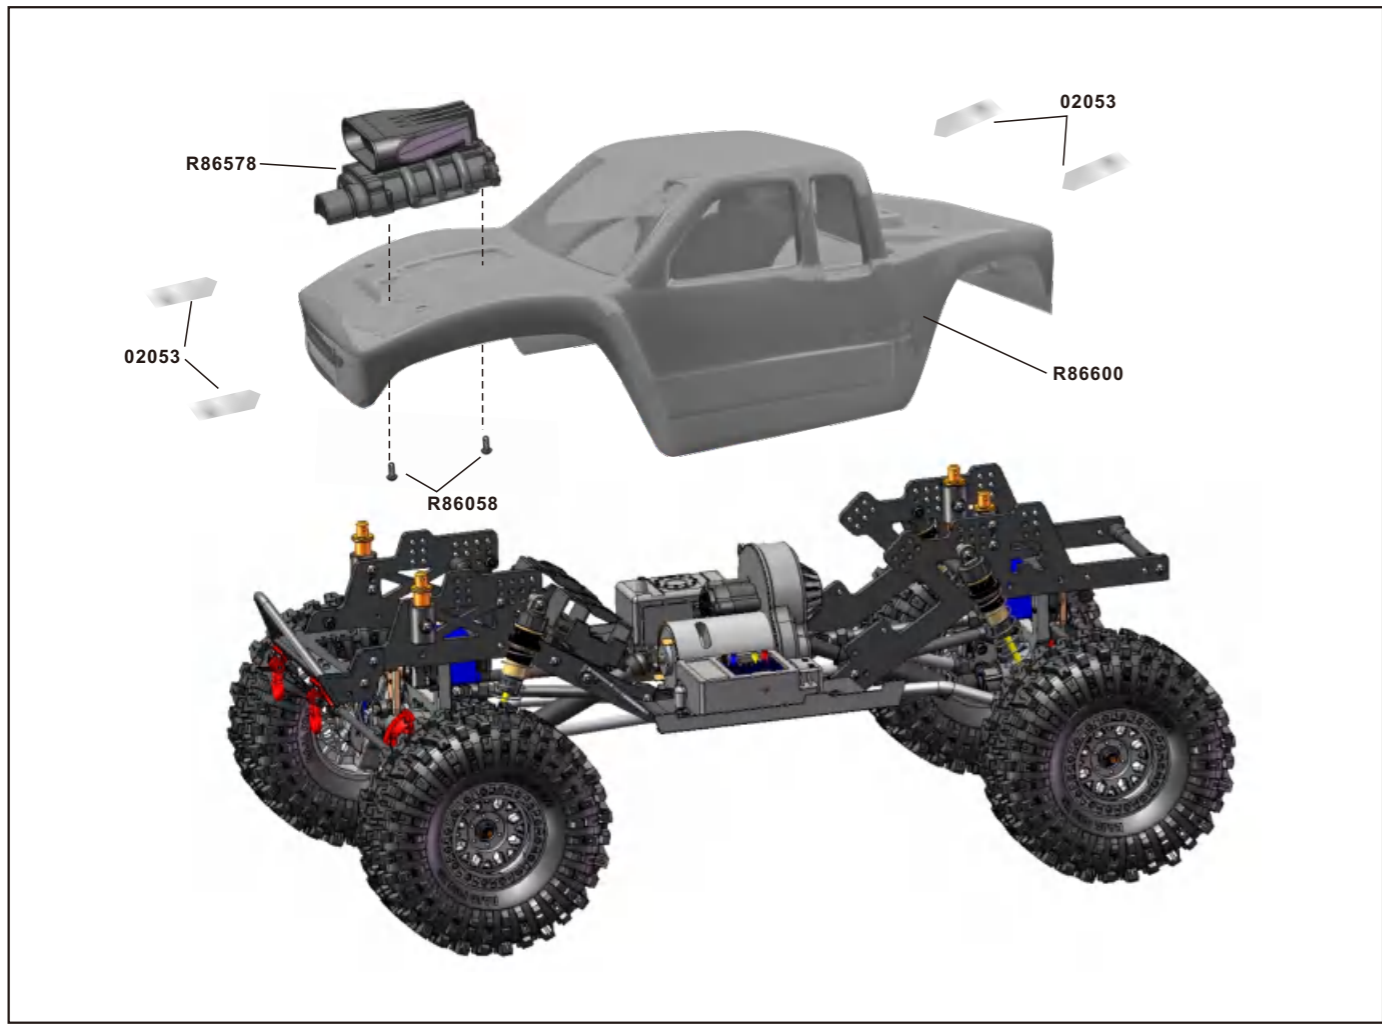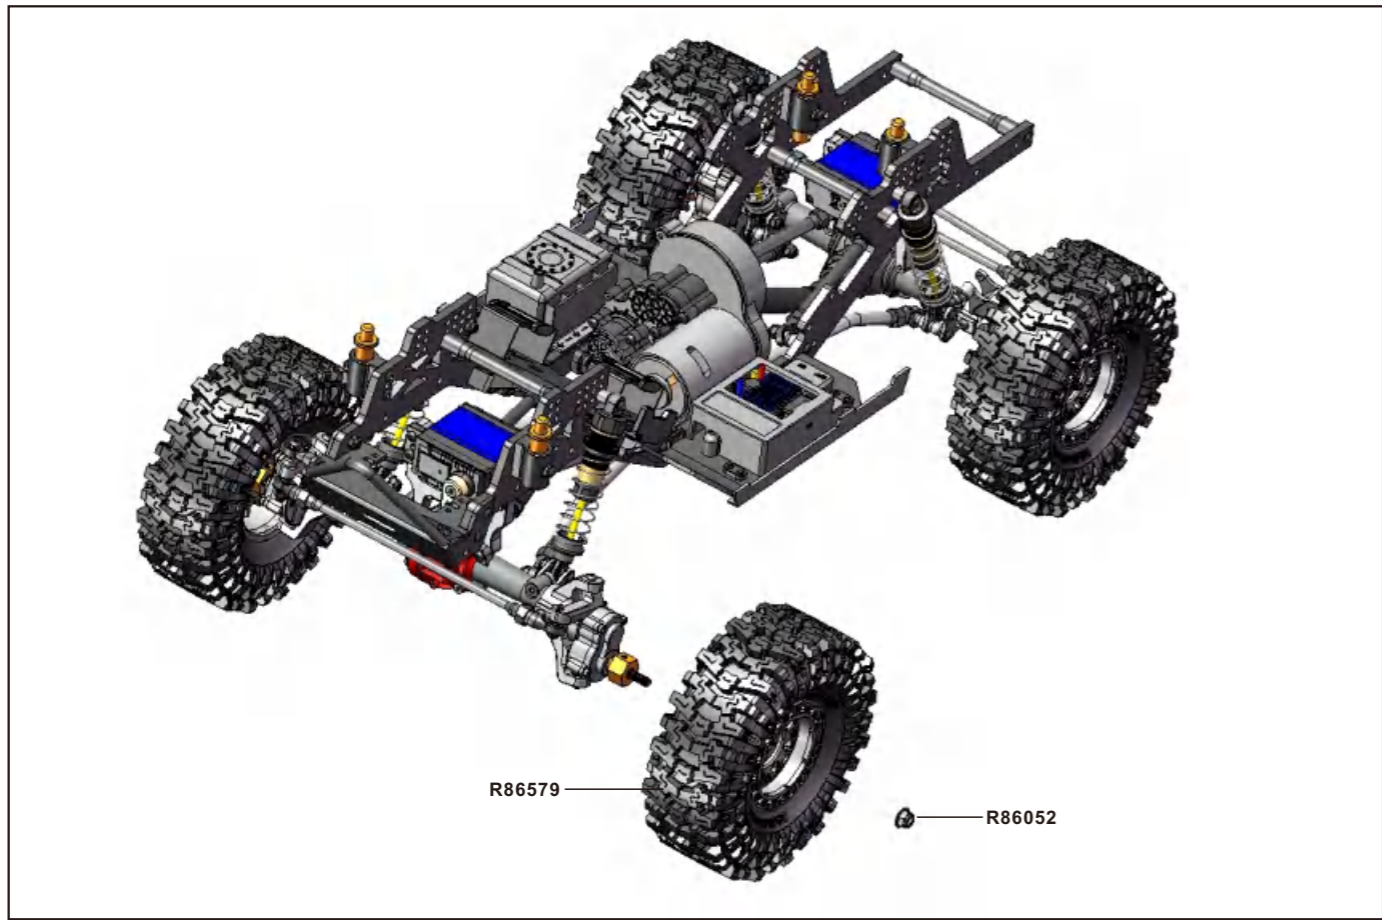























(Right)



































Spare Part				
R86018 Body Post F/R	R86028 Main Gear set(87T)	R86085 Gear Mount	R86262 Distribution Housing	R86263 Motor Cover
R86572 Chassis Mount	R86573 Baffle B(L/R)	R86574 Body Post Mount	R86575 ECS Cable Connector	R86576 ESC Mount
R86577 Receiver Box	R86578 Engine Cover	R86474 Link Ends	R86581 Battery Mount	
R86570 Wheel Rim	R86466 Wheel Complete L/R	R86579 Tire W/Foam	R86580 Chassis Rail	
R86008 Drive Gear(16T)	R86009 Diff Main Gear(40T)	P860018 straight axle mount	R86591 Transmission Gear(28T)	R86598 CVD Drive shaft
R86244 Wheel Hub	R86255 Wheel Hex. W/Pins(2*10)	R86257 Motor Mount	R86279 (20T+20T+20T+28T+53T) Transmission Gear Set	R86599-1 Rear Anti-Angle Holder

Spare Part

P860005-1  (silver) Mount for Link(AL.)	P860045-1  (Red) Front/Rear Axle Box(AL.)	P860049-1  (silver) Caster Mounts (L/R)(AL.)	P860050-1  (silver) Steering Mount R(AL.)	P860051-1  (silver) Steering Mount L(AL.)
R86311  (Long) Rear Drive Axle	R86590  (Short) Front Drive Axle	P860002  (Red) Axle Box Cover(AL.)	R86582  Front Bumper	R86583  Side Guards
P860101  (Silver) Servo Mount(AL.)	R86585  Joint Link	R86586  Upper Link 53.6mm	R86587  Servo link 56mm	R86588  Lower Link
R86589  Steering Link 112mm	R86436  Gear Shaft Set	R86044  Pinion Gear(14T)	R86622  (21T+19T) Transmission Gear	R86623  (20T+20T) Transmission Gear (Optionals)
R86046  Ball Bearing Ø10*Ø15*4	R86047  Ball Bearing Ø5*Ø10*4	R86316  Ball Bearing Ø6*Ø10*3	R86428  Ball Bearing Ø4*Ø8*3	R86246  Ball Bearing Ø18*Ø12*4
R86045  King Pin Bushing	R86048  Ball Stand Ø5.9mm(Short)	R86049  Ball Stand Ø5.9mm (Long)	R86592  Ball Stand Ø5.0mm	R86593  Ball Stand Ø5.9mm

Ball Stand Ø5.9mm (Short)

Spare Part

R86051  Nylon Nut M3	R86052  Flange M4 Lock Nut	R86053  Crub Screw Bolt 3*3mm	R86054  Crub Screw Bolt 4*4mm	R86055  Ø3*Ø8*0.8 Metal Washer
R86057  Gasket(6.8*5*2)	R86594  E-Clips -Ø2.3mm*6P E-Clips -Ø4mm*6P	R86058  Button Head 3*6mm	R86059  Button Head 3*8mm	R86060  Button Head 3*10mm
R86061  Button Head 3*12mm	R86062  Button Head 3*14mm	R86063  Button Head 3*16mm	R86064  Button Head 3*18mm	R86065  Button Head 3*20mm
R86066  Button Head 3*25mm	R86067  Button Head 3*28mm	R86205  Button Head 3*15mm	R86291  Button Head 3*30mm	R86379  Button Head 2*4mm
R86072  Flat Head 2.5*10mm	R86340  Flat Head 3*6mm	R86068  Flat Head 3*8mm	R86596  Flat Head 3*12mm	R86070  Flat Head 3*18mm
R86365  Cap Head 2*5mm	R86289  Cap Head 2*8mm	R86071  Cap Head 2.5*8mm	R86320  Cap Head 2.5*11mm	R86076  Steering Servo 15KG

Spare Part

R86541	R86538	R86338	R86597	R86584
Servo Horn(25T)	Motor-550/8020	ESC - 60A	Wire Head	Batter Strap(L:250mm)
FS-G4P/4WS	PC Body+Sticker	02053	R86314	
	 R86600-0 (Clara) R86600-1 (Orange) R86600-2 (Gray White) R86600-3 (Dark Gray)			
Radio/Receiver		Body Clip	Shock Absorbers	

Optionals

P860065	P860066	P860096	P860097	P860098
Wheel (AL.) (Black)	Wheel (AL.) (Black)	Copper Distribution Housing Weight Set 146g	P860097-1(Silvery) Chassis Mount (AL.) (Black)	P860098-1(Silvery) Distribution Housing(AL.) (Black)
P860099	P860100			
P860099-1(Silvery) Motor Cover(AL.) (Black)	P860100-1(Silvery) Motor Mount(AL.) (Black)			



PRODUCT QUALIFICATION CERTIFICATION

The product has conducted IQC (Input Quality Control) and full inspection before delivery. The manufacturer is responsible for quality assurance. Remote Control model is assembled manually, and then there may have some defects in the production process. Once the product is modified or incorrect operation, it cannot apply for replacement and return services, for the parts and accessories may be damaged.

Please contact the retail seller for after-sales service when needed.

The product conforms to technical requirements of export safety regulations.

Factory Address: Huang Jiang Town, Dong Guan City, Guang Dong Province, China

Website: www.RGT-RACING.Com

Production Date: refer to packing instruction